

Features

- Inventronics patented metal case (Patent NO.: 201530552645.1)
- High Efficiency (Up to 92.5%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Potentiometer (SV models)
Adjustable Output Current (AOC) with Programmability (DV models)
- Isolated 0-10V/10V PWM Dimmable (Only DV models)
- Input Surge Protection: DM 4kV, CM 4kV
- All-Around Protection: OVP, SCP, OTP
- IP65
- SELV Output
- 5 Years Warranty



Description





The EUR-320SxxxDV(SV) series is a 320W, constant-current, AOC LED driver that operates from 90-305 Vac input with excellent power factor. It is designed in round shape and specially created for bay lighting. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

Models

Adjustable Output Current Range(mA)	Full-Power Current Range(mA) ⁽¹⁾	Default Output Current (mA)	Output Voltage Range(Vdc)	Max. Output Power (W)	Typical Efficiency ⁽²⁾	Typical Power Factor		Model Number ⁽³⁾⁽⁴⁾
						120Vac	220Vac	
322-4600	3220-4600	4200	35-100	320	92.5%	0.99	0.96	EUR-320S460DV
2800-4600	3220-4600	4200	35-100	320	92.5%	0.99	0.96	EUR-320S460SV
469-6700	4690-6700	6700	24-68	320	92.5%	0.99	0.96	EUR-320S670DV
4000-6700	4690-6700	6700	24-68	320	92.5%	0.99	0.96	EUR-320S670SV

- Notes:** (1) Output current range with constant power at 320W
 (2) Measured at 100% load and 220Vac input (see below "General Specifications" for details).
 (3) Certified input voltage range: 100-240Vac or 127-250Vdc
 (4) SELV Output.

I-V Operation Area

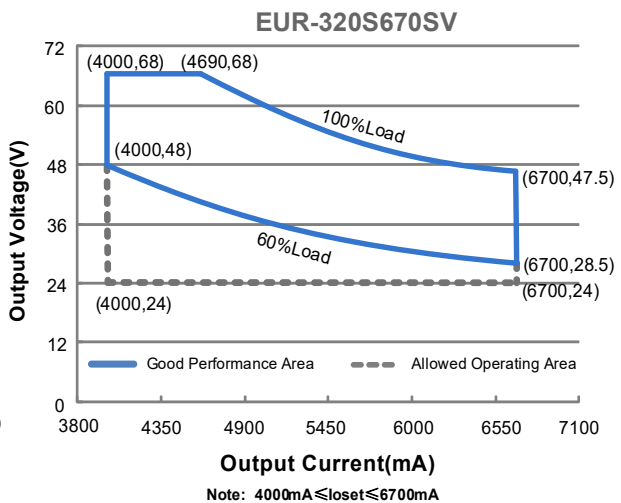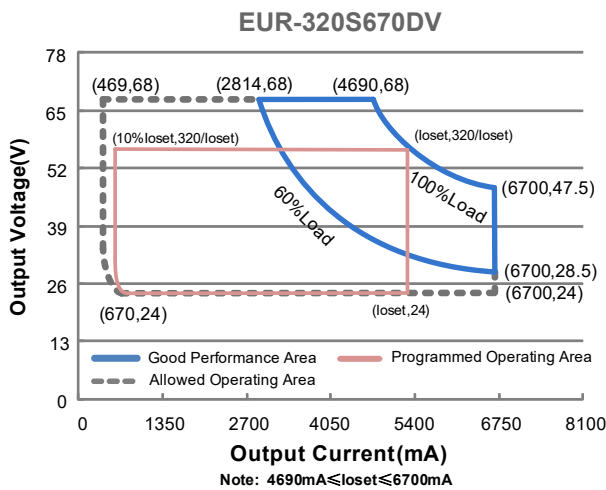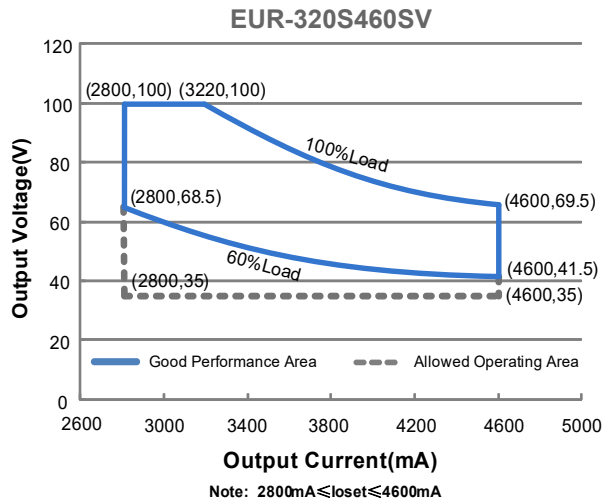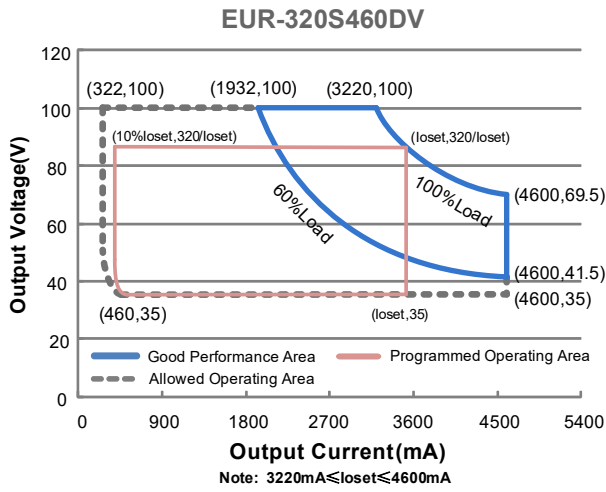

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input AC Voltage	90 Vac	-	305 Vac	
Input DC Voltage	127 Vdc	-	250 Vdc	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.70 mA	IEC 60598-1; 240Vac/ 60Hz
Input AC Current	-	-	3.20 A	Measured at 100% load and 120 Vac input.
	-	-	1.70 A	Measured at 100% load and 220 Vac input.
Inrush Current(I ² t)	-	-	1.30 A ² s	At 220Vac input, 25°C cold start, duration=3.92 ms, 10%Ipk-10%Ipk. See Inrush Current Waveform for the details.

Input Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
PF	0.90	-	-	At 100-240Vac, 50-60Hz, 60%-100% Load (192-320W)
THD	-	-	20%	
THD	-	-	10%	At 220-240Vac, 50-60Hz, 75%-100% Load (240-320W)

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%loset	-	5%loset	At 100% load condition
Output Current Setting(loset) Range				
EUR-320S460DV	322 mA	-	4600 mA	
EUR-320S460SV	2800 mA	-	4600 mA	
EUR-320S670DV	469 mA	-	6700 mA	
EUR-320S670SV	4000 mA	-	6700 mA	
Output Current Setting Range with Constant Power				
EUR-320S460DV	3220 mA	-	4600 mA	
EUR-320S460SV	3220 mA	-	4600 mA	
EUR-320S670DV	4690 mA	-	6700 mA	
EUR-320S670SV	4690 mA	-	6700 mA	
Total Output Current Ripple (pk-pk)	-	5%lomax	10%lomax	At 100% load condition. 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	-	2%lomax	-	At 100% load condition. Only this component of ripple is associated with visible flicker.
Startup Overshoot Current	-	-	10%lomax	At 100% load condition
No Load Output Voltage				
EUR-320S460DV/SV	-	-	120 V	
EUR-320S670DV/SV	-	-	85 V	
Line Regulation	-	-	±0.5%	Measured at 100% load
Load Regulation	-	-	±1.5%	
Turn-on Delay Time	-	-	1.0 s	Measured at 120Vac input, 60%-100% Load
	-	-	0.5 s	Measured at 220Vac input, 60%-100% Load
Temperature Coefficient of loset	-	0.03%/°C	-	Case temperature = 0°C ~Tc max
12V Auxiliary Output Voltage	10.8 V	12 V	13.2 V	
12V Auxiliary Output Source Current	0 mA	-	20 mA	Return terminal is "Dim"

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input: EUR-320S460DV/SV I _o =3220 mA I _o =4600 mA EUR-320S670DV/SV I _o =4690 mA I _o =6700 mA	88.00% 87.00%	90.00% 89.00%	- -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 220 Vac input: EUR-320S460DV/SV I _o =3220 mA I _o =4600 mA EUR-320S670DV/SV I _o =4690 mA I _o =6700 mA	90.50% 90.00%	92.50% 92.00%	- -	
Efficiency at 277 Vac input: EUR-320S460DV/SV I _o =3220 mA I _o =4600 mA EUR-320S670DV/SV I _o =4690 mA I _o =6700 mA	90.00% 90.00%	92.00% 92.00%	- -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
MTBF	-	294,000 Hours	-	
Lifetime	-	75,000 Hours	-	Measured at 220Vac input, 80%Load and 70°C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety T _{c_s}	-40°C	-	+85°C	
Operating Case Temperature for Warranty T _{c_w}	-40°C	-	+75°C	Case temperature for 5 years warranty
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 100%RH
Dimensions Inches (∅× H) Millimeters (∅× H)	∅7.48 x 3.13 ∅190 x 79.6			
Net Weight	-	2280 g	-	

Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the V _{dim} (+) Pin	-20 V	-	20 V	
Source Current on V _{dim} (+) Pin	200 uA	300 uA	450 uA	V _{dim} (+) = 0 V
Dimming Output Range	EUR-320S460DV EUR-320S670DV	10% I _o set	-	I _o set ≤ 3220 mA ≤ I _o set ≤ 4600 mA 4690 mA ≤ I _o set ≤ 6700 mA
	EUR-320S460DV EUR-320S670DV	322 mA 469 mA	-	322 mA ≤ I _o set < 3220 mA 469 mA ≤ I _o set < 4690 mA
Recommended Dimming Input Range	0 V	-	10 V	Default 0-10V dimming mode.

Dimming Specifications (Continued)


Parameter	Min.	Typ.	Max.	Notes
PWM_in High Level	-	10V	-	Dimming mode set to PWM in Inventronics Programming Software.
PWM_in Low Level	-	0V	-	
PWM_in Frequency Range	200 Hz	-	2 KHz	
PWM_in Duty Cycle	0%	-	100%	

Safety & EMC Compliance


Safety Category	Standard
CE	EN 61347-1, EN 61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
CCC	GB 19510.1, GB 19510.14
EMI Standards	Notes
EN IEC 55015/GB/T 17743 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN IEC 61000-3-2/GB 17625.1	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 4 kV, Common Mode 4 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.


Derating

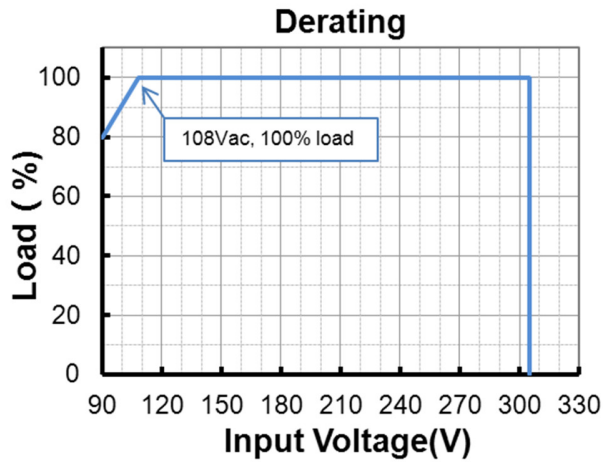





Lifetime vs. Case Temperature

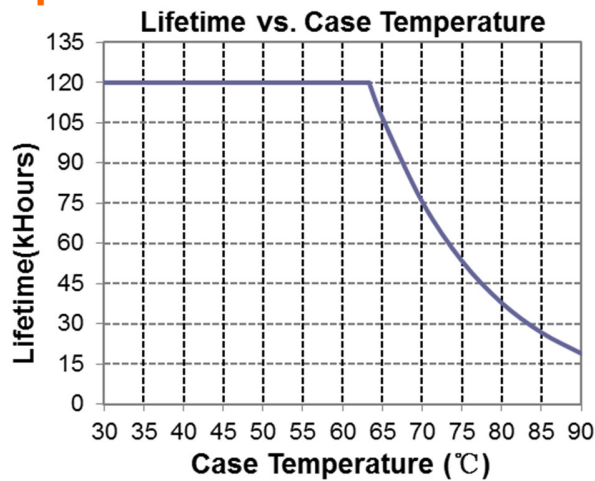


Inrush Current Waveform

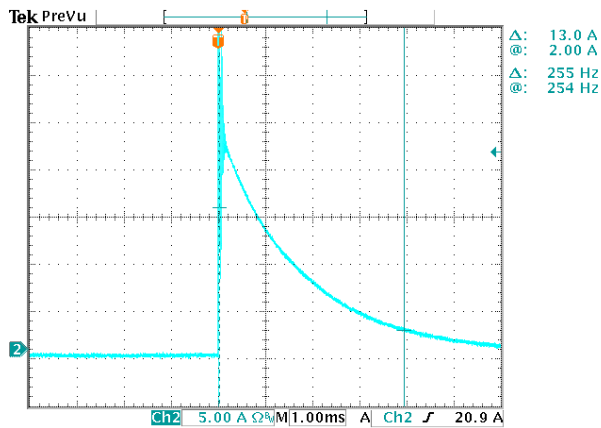


Efficiency vs. Load

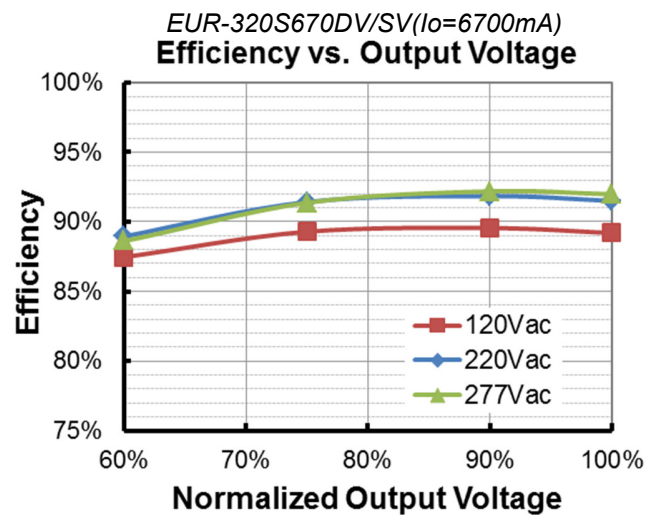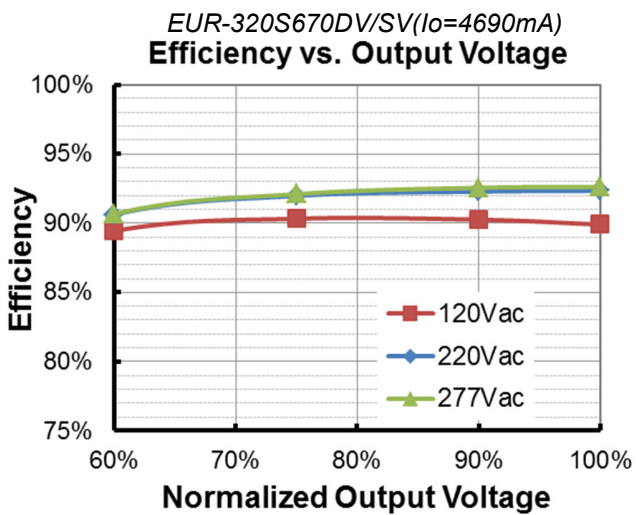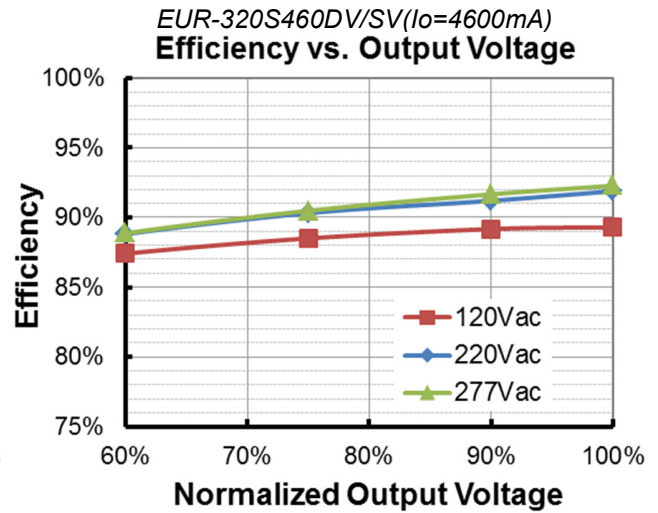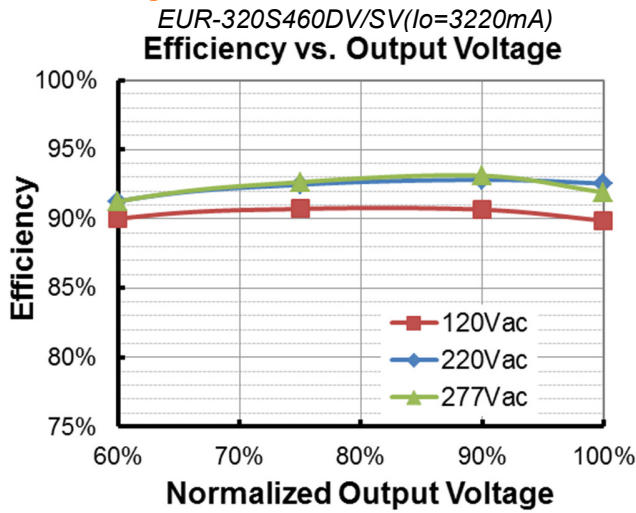

Power Factor

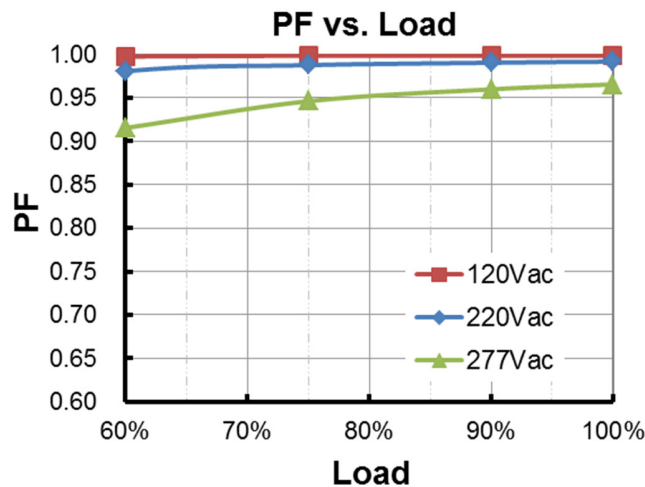

Total Harmonic Distortion

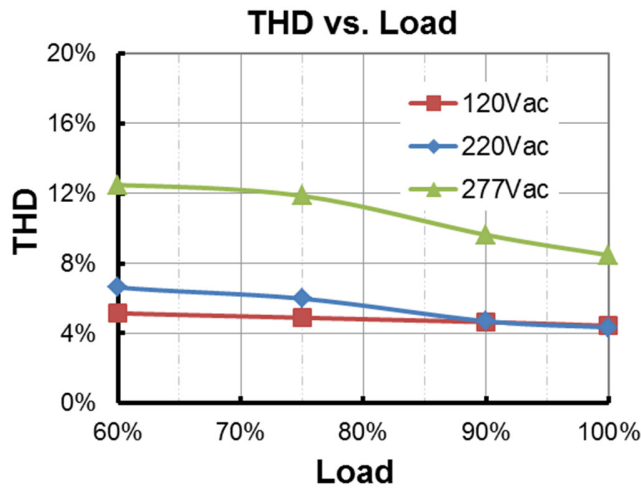


Protection Functions

Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.

Dimming

● 0-10V Dimming (Only DV models)

The recommended implementation of the dimming control is provided below.

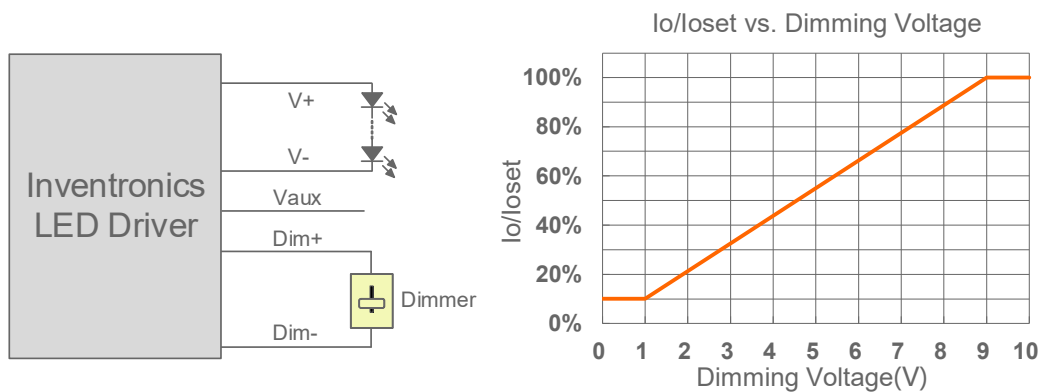


Implementation 1: Positive logic

Notes:

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like zener.

● 10V PWM Dimming (Only DV models)

The recommended implementation of the dimming control is provided below.

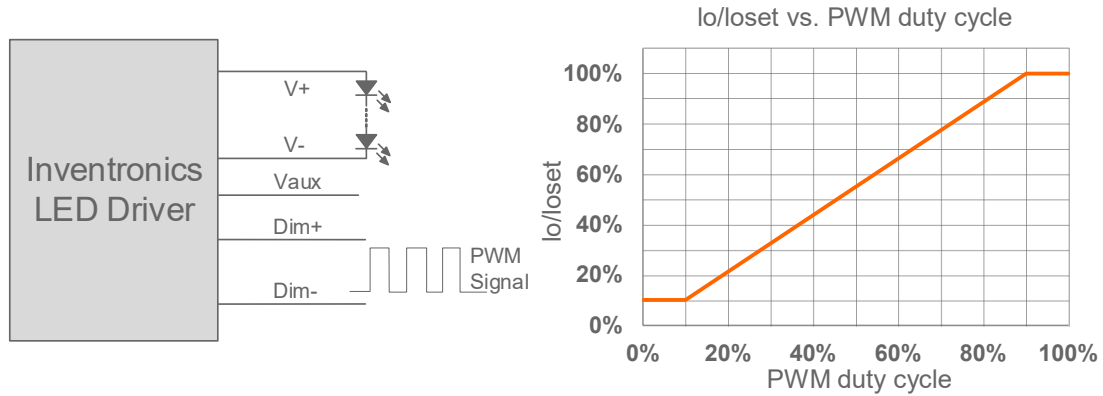


Implementation 2: Positive logic

Notes:

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.

Programming Connection Diagram (Only DV models)

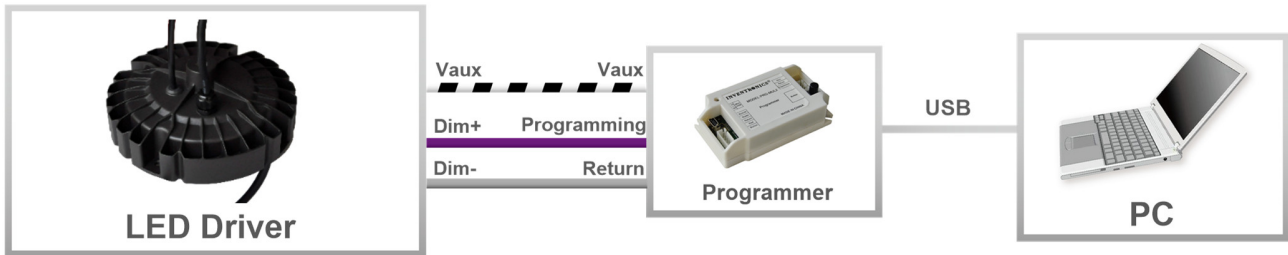


Note: The driver does not need to be powered on during the programming process.

- Please refer to [PRG-MUL2 \(Programmer\) datasheet](#) for details.

Installations

Part Number Suffix	-0000	-0001
Product Type	Center Wire Feed	Outside Wire Feed

Installations (Continued)

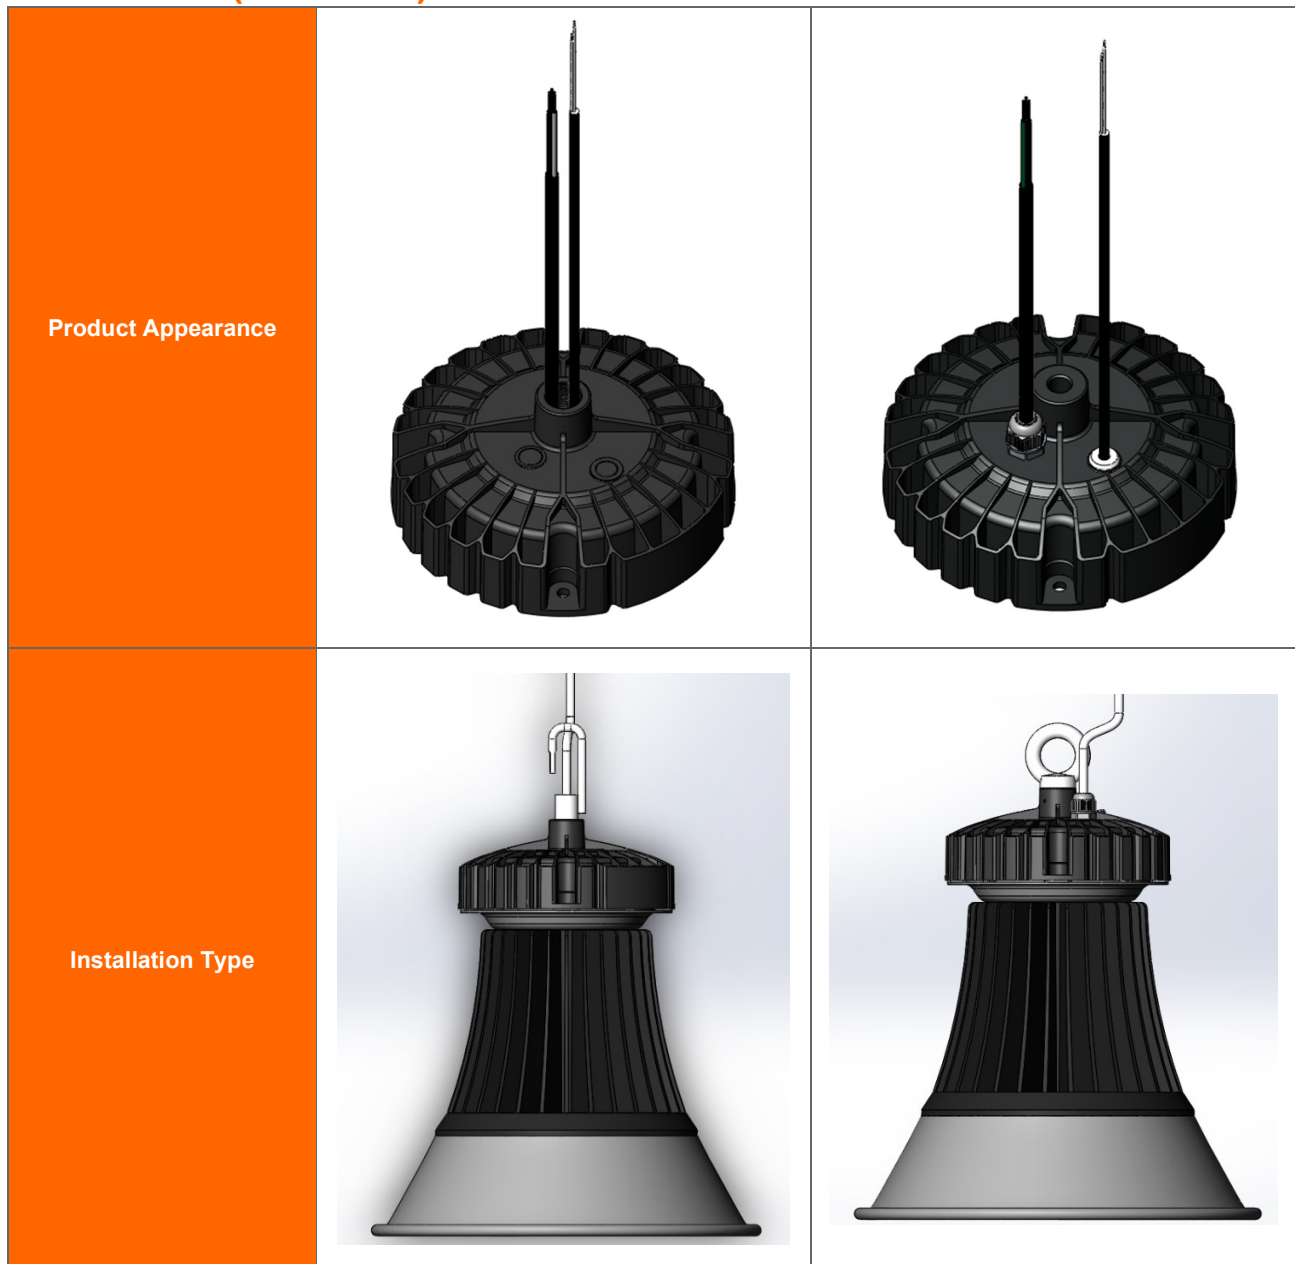


Caution:


1. Complete visual inspection prior to assembly to insure driver is received in proper condition.
2. Thread length for mounting accessory (hook, ring, etc.) should be 16-22mm. After mounting accessory (hook, ring, etc.) is installed an M4 set screw should be secured in the open location on the driver collar.
3. Maximum weight of combined luminaire/driver assembly should not exceed 16.5Kg.

Mechanical Outline


EUR-320SxxxDV-0000

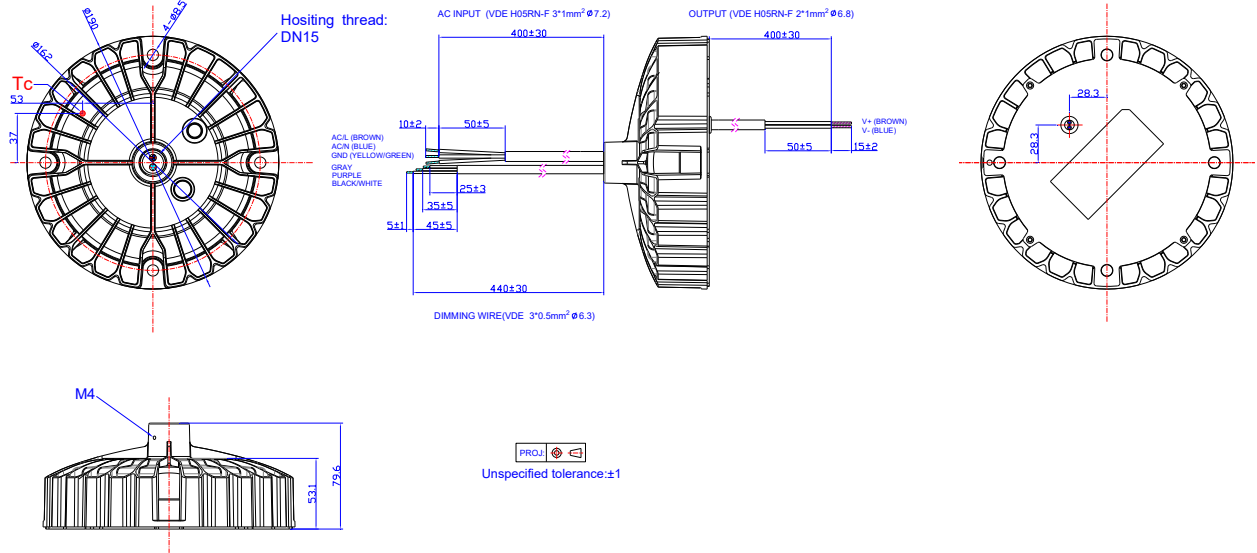


EUR-320SxxxSV-0000

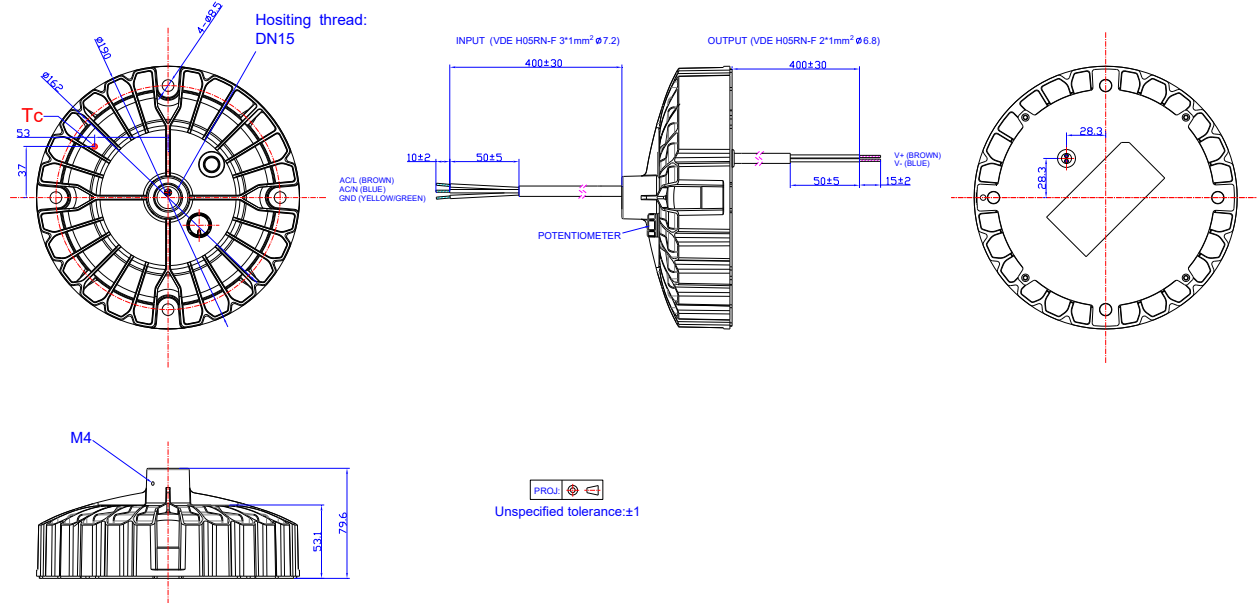



EUR-320SxxxDV-0001

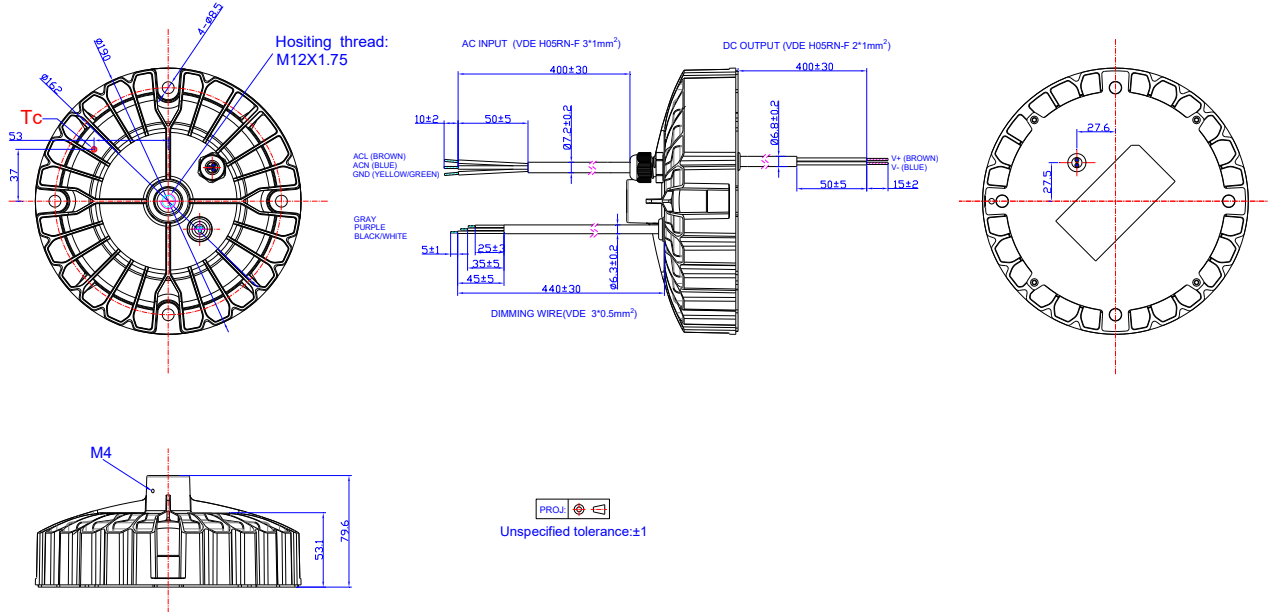

EUR-320SxxxSV-0001

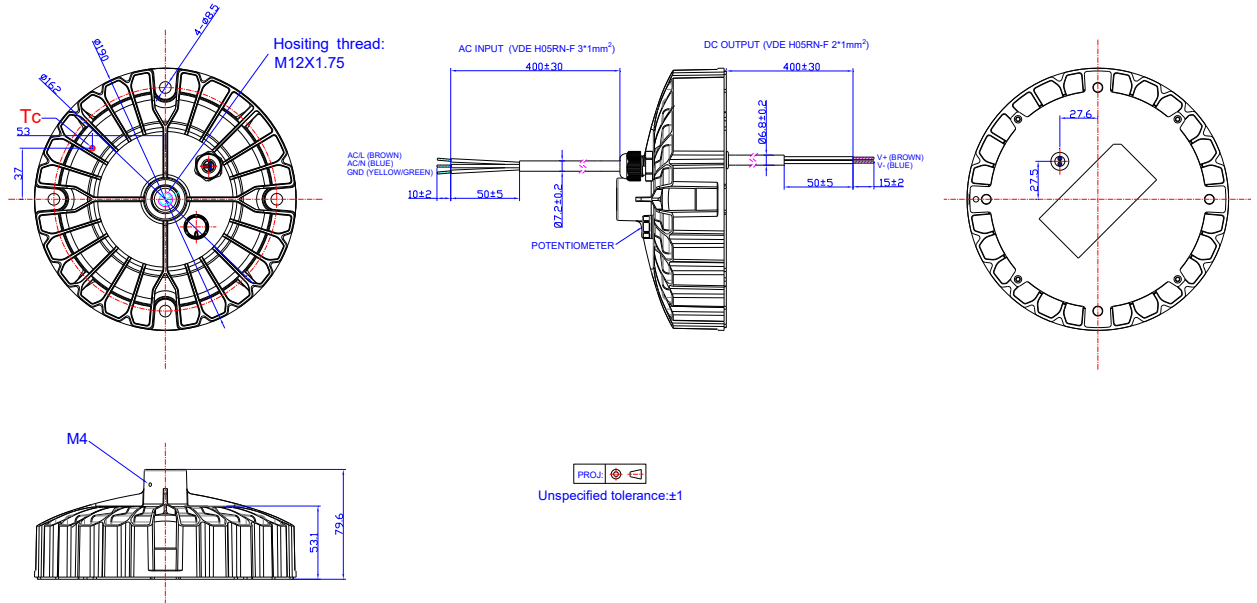

Optional Metal Parts

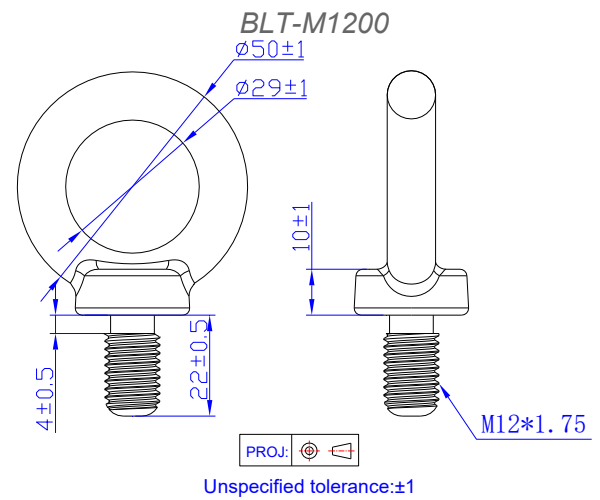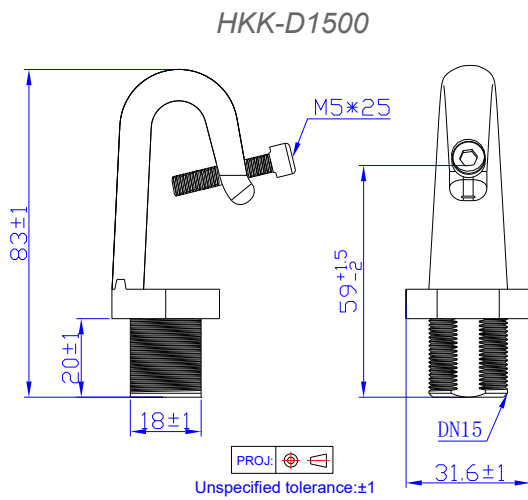

RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2019-01-09	A	Datasheets Release	/	/
2024-03-29	B	ENEC/TUV logo	/	Deleted
		Independent logo	/	Added
		Features	/	Updated
		Safety &EMC Compliance	/	Updated
		Programming Connection Diagram	/	Updated
		RoHS Compliance	/	Updated
2025-01-14	C	Format	/	Updated
		PSE logo	/	Deleted
		Safety &EMC Compliance	PSE	Deleted