

Features

- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Isolated 0-10V/PWM/3-Timer-Modes Dimmable
- INV Digital Dimming, UART Based Communication Protocol
- Dim-to-Off with Standby Power ≤ 0.5 W
- Always-on Auxiliary Power: 12Vdc, 250mA, 3W (Transient Peak Power up to 10W)
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IUVP, IOVP, OVP, SCP, OTP
- IP66/IP67 and UL Dry/Damp/Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5 Years Warranty



Description





The EUM-240SxxxMx series is a 240W, constant-current, programmable and IP66/IP67 rated LED driver that operates from 90-305Vac input with excellent power factor. Created for smart lighting application, this family provides an auxiliary voltage and dim-to-off functionality for powering low voltage, wireless controls. The dimming control supports 0-10V dimming as well as two-way communication via Digital Dimming, a UART based communication protocol. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, input under voltage, input over voltage, output over voltage, short circuit, and over temperature.

Models

| Adjustable Output Current Range (mA) | Full-Power Current Range (mA) ⁽¹⁾ | Default Output Current (mA) | Output Voltage Range (Vdc) | Max. Output Power (W) | Typical Efficiency ⁽²⁾ | Typical Power Factor | | Model Number ⁽³⁾⁽⁴⁾ |
|--------------------------------------|--|-----------------------------|----------------------------|-----------------------|-----------------------------------|----------------------|--------|--------------------------------|
| | | | | | | 120Vac | 220Vac | |
| 70-1050 | 700-1050 | 700 | 115-343 | 240 | 94.0% | 0.99 | 0.96 | EUM-240S105Mx |
| 105-1500 | 1050-1500 | 1050 | 80-229 | 240 | 93.5% | 0.99 | 0.96 | EUM-240S150Mx |
| 215-3500 | 2150-3500 | 2150 | 35-111 | 240 | 93.0% | 0.99 | 0.96 | EUM-240S350Mx ⁽⁵⁾ |
| 420-6700 | 4200-6700 | 4900 | 18-57 | 240 | 92.5% | 0.99 | 0.96 | EUM-240S670Mx ⁽⁵⁾ |

- Notes:** (1) Output current range with constant power at 240W.
 (2) Measured at 100% load and 220Vac input (see below "General Specifications" for details).
 (3) Certified input voltage range: UL, FCC 100-277Vac; otherwise 100-240Vac.
 (4) x = G are UL Recognized, ENEC and CCC, etc. models; x = T are UL Class P models, x = B are BIS models.
 (5) SELV output.

I-V Operation Area

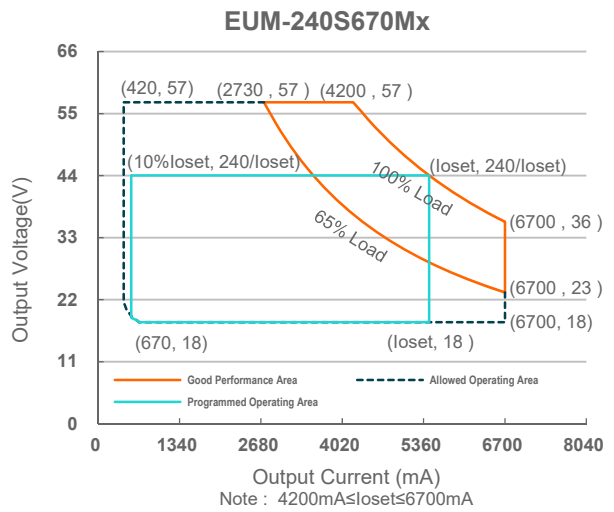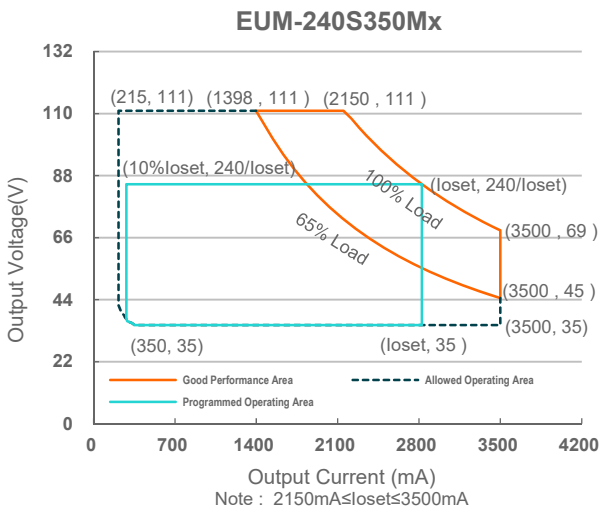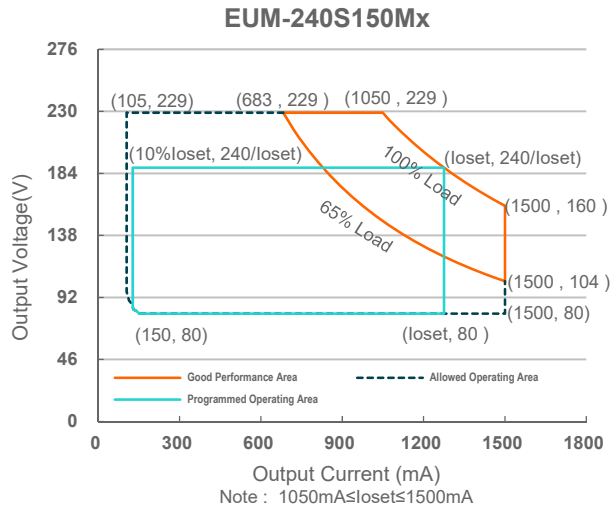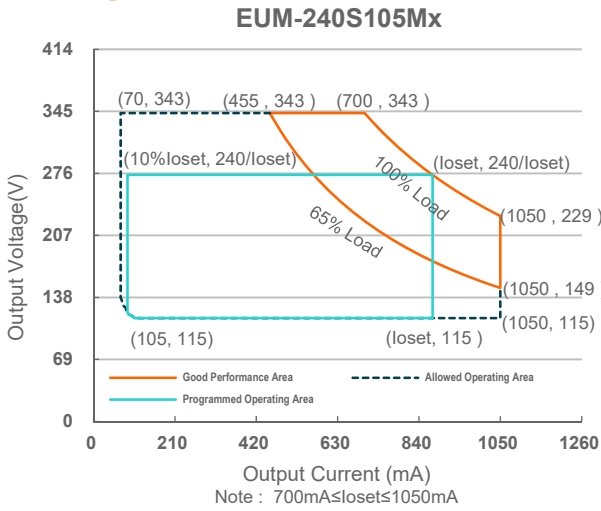

Input Specifications

| Parameter | Min. | Typ. | Max. | Notes |
|----------------------------------|---------|------|-----------------------|--|
| Input AC Voltage | 90 Vac | - | 305 Vac | |
| Input DC Voltage | 127 Vdc | - | 300 Vdc | |
| Input Frequency | 47 Hz | - | 63 Hz | |
| Leakage Current | - | - | 0.75 MIU | UL 8750; 277Vac/60Hz |
| | - | - | 0.70 mA | IEC 60598-1; 240Vac/60Hz |
| Input AC Current | - | - | 2.54 A | Measured at 100% load and 120 Vac input. |
| | - | - | 1.34 A | Measured at 100% load and 220 Vac input. |
| Inrush Current(I ² t) | - | - | 4.39 A ² s | At 220Vac input, 25°C cold start, duration=1.74 ms, 10%I _{pk} -10%I _{pk} . |

Input Specifications (Continued)

| Parameter | Min. | Typ. | Max. | Notes |
|-----------|------|------|------|---|
| PF | 0.9 | - | - | At 100-277Vac, 50-60Hz, 65%-100%load (156-240W) |
| THD | - | - | 20% | |
| THD | - | - | 10% | At 220-240Vac, 50-60Hz, 75%-100%load (180-240W) |

Output Specifications

| Parameter | Min. | Typ. | Max. | Notes |
|--|----------|----------|----------|---|
| Output Current Tolerance | -5%loset | - | 5%loset | At 100% load condition |
| Output Current Setting(loset) Range | | | | |
| EUM-240S105Mx | 70 mA | - | 1050 mA | |
| EUM-240S150Mx | 105 mA | - | 1500 mA | |
| EUM-240S350Mx | 215 mA | - | 3500 mA | |
| EUM-240S670Mx | 420 mA | - | 6700 mA | |
| Output Current Setting Range with Constant Power | | | | |
| EUM-240S105Mx | 700 mA | - | 1050 mA | |
| EUM-240S150Mx | 1050 mA | - | 1500 mA | |
| EUM-240S350Mx | 2150 mA | - | 3500 mA | |
| EUM-240S670Mx | 4200 mA | - | 6700 mA | |
| Total Output Current Ripple (pk-pk) | - | 5%lomax | 10%lomax | At 100% load condition. 20 MHz BW |
| Output Current Ripple at < 200 Hz (pk-pk) | - | 2%lomax | - | At 100% load condition. Only this component of ripple is associated with visible flicker. |
| Startup Overshoot Current | - | - | 10%lomax | At 100% load condition |
| No Load Output Voltage | | | | |
| EUM-240S105Mx | - | - | 400 V | |
| EUM-240S150Mx | - | - | 290 V | |
| EUM-240S350Mx | - | - | 120 V | |
| EUM-240S670Mx | - | - | 75 V | |
| Line Regulation | - | - | ±0.5% | Measured at 100% load |
| Load Regulation | - | - | ±3.0% | |
| Turn-on Delay Time | - | - | 0.5 s | Measured at 120-277Vac input, 65%-100%load |
| Temperature Coefficient of loset | - | 0.03%/°C | - | Case temperature = 0°C ~Tc max |
| 12V Auxiliary Output Voltage | 10.8 V | 12 V | 13.2 V | |
| 12V Auxiliary Output Source Current | 0 mA | - | 250 mA | Return terminal is "Dim-" |
| 12V Auxiliary Output Transient Peak Current@6W | - | - | 500 mA | 500mA peak for a maximum duration of 2.2ms in a 6.0ms period during which time the average should not exceed 250mA. |
| 12V Auxiliary Output Transient Peak Current@10W | - | - | 850 mA | 850mA peak for a maximum duration of 1.3ms in a 5.2ms period during which time the average should not exceed 250mA. |

General Specifications

| Parameter | Min. | Typ. | Max. | Notes |
|--|--------------------|---------------|-------|--|
| Efficiency at 120 Vac input: EUM-240S105Mx | | | | Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.) |
| I _o = 700 mA | 89.0% | 91.0% | - | |
| I _o =1050 mA | 89.0% | 91.0% | - | |
| EUM-240S150Mx | | | | |
| I _o =1050 mA | 88.5% | 90.5% | - | |
| I _o =1500 mA | 88.5% | 90.5% | - | |
| EUM-240S350Mx | | | | |
| I _o =2150 mA | 88.0% | 90.0% | - | |
| I _o =3500 mA | 87.5% | 89.5% | - | |
| EUM-240S670Mx | | | | |
| I _o =4200 mA | 87.5% | 89.5% | - | |
| I _o =6700 mA | 86.5% | 88.5% | - | |
| Efficiency at 220 Vac input: EUM-240S105Mx | | | | Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.) |
| I _o = 700 mA | 92.0% | 94.0% | - | |
| I _o =1050 mA | 92.0% | 94.0% | - | |
| EUM-240S150Mx | | | | |
| I _o =1050 mA | 91.5% | 93.5% | - | |
| I _o =1500 mA | 91.0% | 93.0% | - | |
| EUM-240S350Mx | | | | |
| I _o =2150 mA | 91.0% | 93.0% | - | |
| I _o =3500 mA | 90.5% | 92.5% | - | |
| EUM-240S670Mx | | | | |
| I _o =4200 mA | 90.5% | 92.5% | - | |
| I _o =6700 mA | 90.0% | 92.0% | - | |
| Efficiency at 277 Vac input: EUM-240S105Mx | | | | Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.) |
| I _o = 700 mA | 92.5% | 94.5% | - | |
| I _o =1050 mA | 92.5% | 94.5% | - | |
| EUM-240S150Mx | | | | |
| I _o =1050 mA | 92.0% | 94.0% | - | |
| I _o =1500 mA | 91.5% | 93.5% | - | |
| EUM-240S350Mx | | | | |
| I _o =2150 mA | 91.5% | 93.5% | - | |
| I _o =3500 mA | 90.5% | 92.5% | - | |
| EUM-240S670Mx | | | | |
| I _o =4200 mA | 91.0% | 93.0% | - | |
| I _o =6700 mA | 90.0% | 92.0% | - | |
| Standby Power | - | - | 0.5 W | Measured at 230Vac/50Hz; Dimming off |
| MTBF | - | 201,000 Hours | - | Measured at 220Vac input, 80%load and 25°C ambient temperature (MIL-HDBK-217F) |
| Lifetime | - | 101,000 Hours | - | Measured at 220Vac input, 80%load and 70°C case temperature; See lifetime vs. T _c curve for the details |
| Operating Case Temperature for Safety T _{c_s} | -40°C | - | +90°C | |
| Operating Case Temperature for Warranty T _{c_w} | -40°C | - | +80°C | Case temperature for 5 years warranty Humidity: 10% RH to 95% RH |
| Storage Temperature | -40°C | - | +85°C | Humidity: 5%RH to 95%RH |
| Dimensions | | | | With mounting ear |
| Inches (L × W × H) | 7.91 × 2.66 × 1.52 | | | 8.58 × 2.66 × 1.52 |
| Millimeters (L × W × H) | 201 × 67.5 × 38.5 | | | 218 × 67.5 × 38.5 |
| Net Weight | - | 1050 g | - | |

Dimming Specifications

| Parameter | | Min. | Typ. | Max. | Notes |
|--|--|-------------------------------------|-------------|-------------|---|
| Absolute Maximum Voltage on the Vdim (+) Pin | | -20 V | - | 20 V | |
| Source Current on Vdim (+)Pin | | 200 μ A | 300 μ A | 450 μ A | Vdim(+) = 0 V |
| Dimming Output Range | EUM-240S105Mx EUM-240S150Mx EUM-240S350Mx EUM-240S670Mx | 10%loset | - | loset | 700 mA \leq loset \leq 1050 mA 1050 mA \leq loset \leq 1500 mA 2150 mA \leq loset \leq 3500 mA 4200 mA \leq loset \leq 6700 mA |
| | EUM-240S105Mx EUM-240S150Mx EUM-240S350Mx EUM-240S670Mx | 70 mA 105 mA 215 mA 420 mA | - | loset | 70 mA \leq loset < 700 mA 105 mA \leq loset < 1050 mA 215 mA \leq loset < 2150 mA 420 mA \leq loset < 4200 mA |
| Recommended Dimming Input Range | | 0 V | - | 10 V | Default 0-10V dimming mode. |
| Dim off Voltage | | 0.35 V | 0.5 V | 0.65 V | |
| Dim on Voltage | | 0.55 V | 0.7 V | 0.85 V | |
| Hysteresis | | - | 0.2 V | - | |
| PWM_in High Level | | 3 V | - | 10 V | Dimming mode set to PWM in Inventronics Programing Software. |
| PWM_in Low Level | | -0.3 V | - | 0.6 V | |
| PWM_in Frequency Range | | 200 Hz | - | 3 KHz | |
| PWM_in Duty Cycle | | 1% | - | 99% | |
| PWM Dimming off (Positive Logic) | | 3% | 5% | 8% | |
| PWM Dimming on (Positive Logic) | | 5% | 7% | 10% | |
| PWM Dimming off (Negative Logic) | | 92% | 95% | 97% | |
| PWM Dimming on (Negative Logic) | | 90% | 93% | 95% | |
| Hysteresis | | - | 2% | - | |

Safety & EMC Compliance


| Safety Category | Standard |
|-----------------|----------------------------------|
| UL/CUL | UL 8750,CAN/CSA-C22.2 No. 250.13 |
| ENEC & CE | EN 61347-1, EN 61347-2-13 |
| CB | IEC 61347-1, IEC 61347-2-13 |
| CCC | GB 19510.1, GB 19510.14 |
| PSE | J 61347-1, J 61347-2-13 |
| KS | KS C 7655 |
| NOM | NOM-058-SCFI |

Safety & EMC Compliance (Continued)


| Safety Category | Standard |
|--|---|
| EAC | TP TC 004, TP TC 020 |
| SAA | AS/NZS 61347.1, AS/NZS 61347.2.13 |
| BIS | IS 15885(Part2/Sec13) |
| Performance | Standard |
| ENEC | EN IEC 62384 |
| EMI Standards | Notes |
| EN IEC 55015/GB/T 17743/KS C 9815 ⁽¹⁾ | Conducted emission Test & Radiated emission Test |
| EN IEC 61000-3-2/GB 17625.1 | Harmonic current emissions |
| EN 61000-3-3 | Voltage fluctuations & flicker |
| FCC Part 15 ⁽¹⁾ | ANSI C63.4 Class B |
| | This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired operation. |
| EMS Standards | Notes |
| EN 61000-4-2 | Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge |
| EN 61000-4-3 | Radio-Frequency Electromagnetic Field Susceptibility Test-RS |
| EN 61000-4-4 | Electrical Fast Transient / Burst-EFT |
| EN 61000-4-5 | Surge Immunity Test: AC Power Line: Differential Mode 6 kV, Common Mode 10 kV |
| EN 61000-4-6 | Conducted Radio Frequency Disturbances Test-CS |
| EN 61000-4-8 | Power Frequency Magnetic Field Test |
| EN 61000-4-11 | Voltage Dips |
| EN 61547/KS C 9547 | Electromagnetic Immunity Requirements Applies To Lighting Equipment |

Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.


Derating

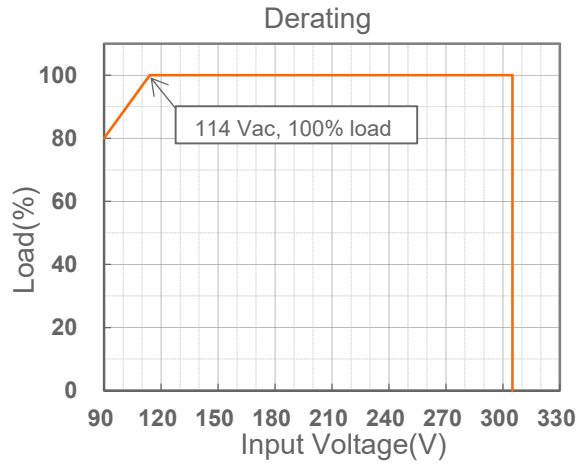

Lifetime vs. Case Temperature

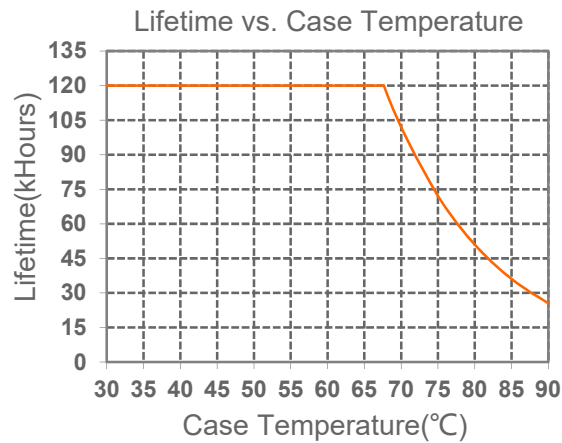

Inrush Current Waveform




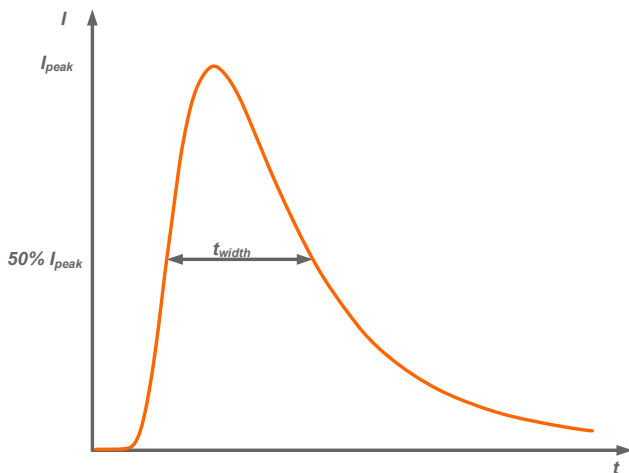






| Input AC Voltage | I_{peak} | t_{width} (@ 50% I_{peak}) |
|------------------|------------|------------------------------------|
| 120Vac | 32.0A | 440 μ s |
| 220Vac | 58.0A | 500 μ s |
| 277Vac | 82.0A | 440 μ s |

Inrush Current Waveform (Continued)


| | | | | | | | | | |
|--|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| MCB | Tripping Curves | B | B | B | B | C | C | C | C |
| | Rated Current | 10A | 16A | 20A | 25A | 10A | 16A | 20A | 25A |
| The Number of LED Driver can be Configured | 120Vac | 2 | 4 | 5 | 6 | 3 | 5 | 6 | 7 |
| | 220Vac | 2 | 4 | 5 | 6 | 4 | 7 | 8 | 11 |
| | 277Vac | 2 | 3 | 4 | 5 | 3 | 5 | 7 | 8 |

Efficiency vs. Load

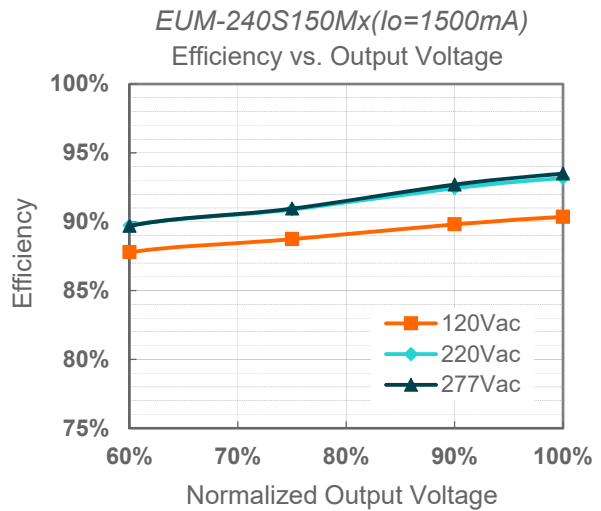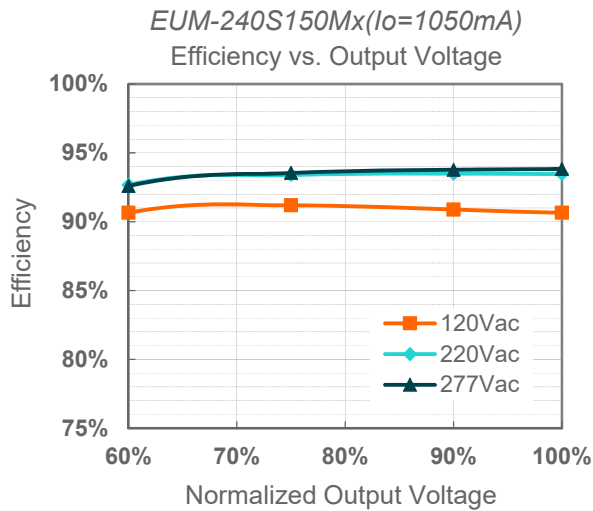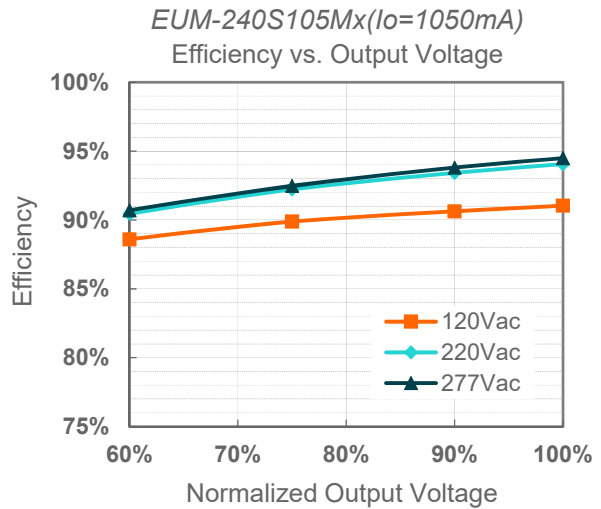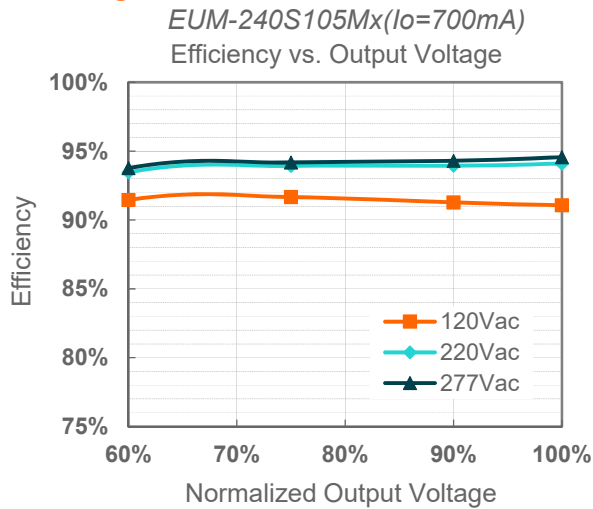


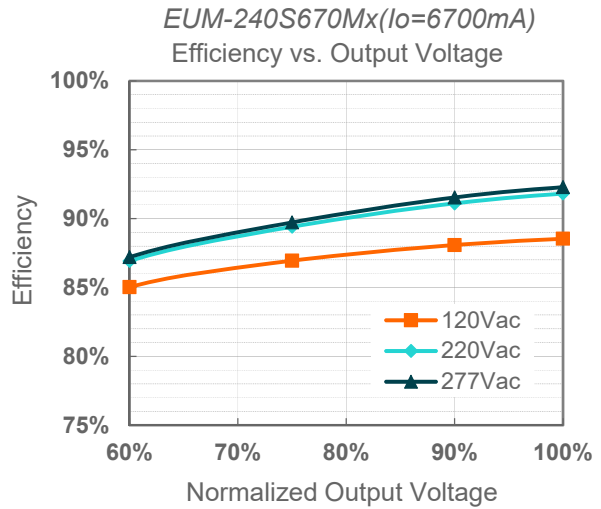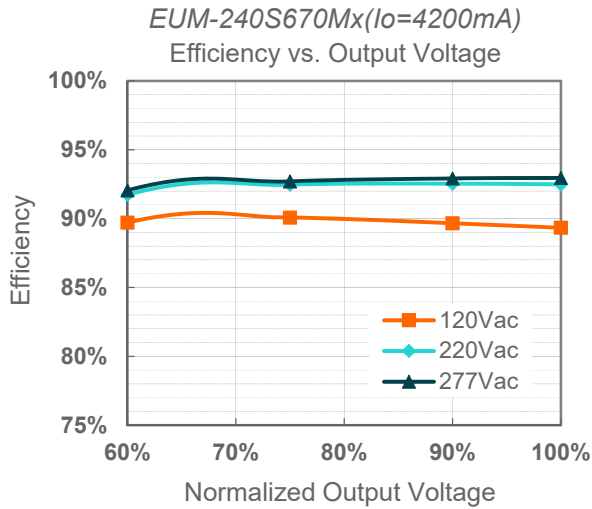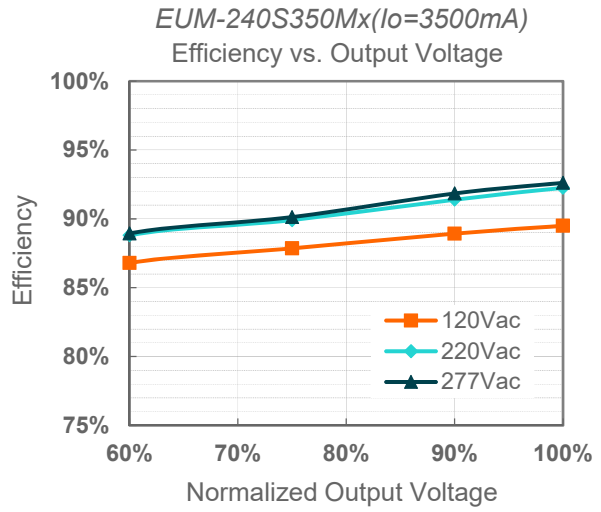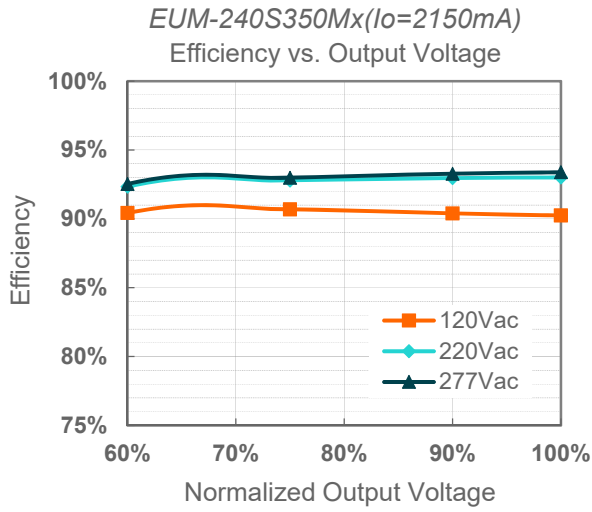

Power Factor

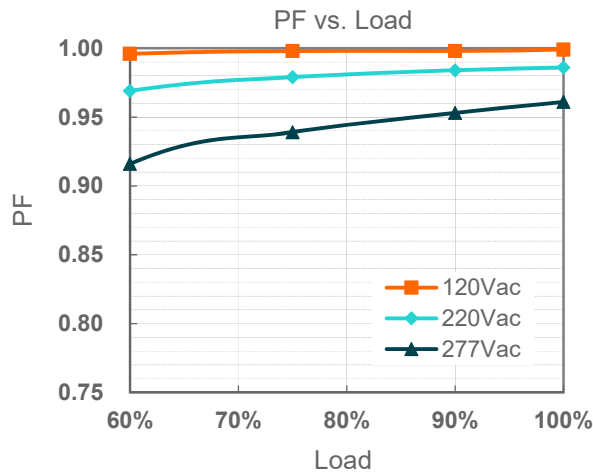


Total Harmonic Distortion

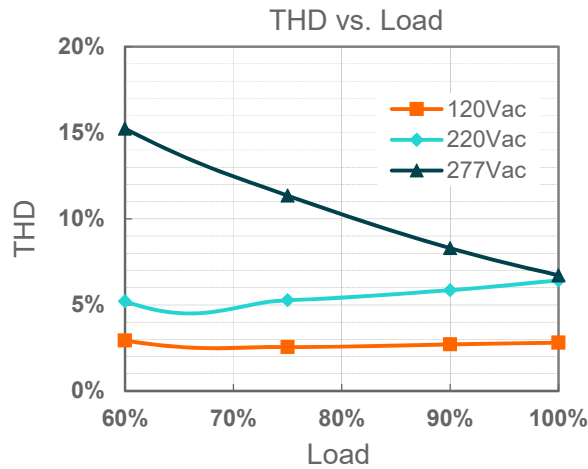


Protection Functions

| Parameter | | Min. | Typ. | Max. | Notes |
|--------------------------------------|--------------------------------|--|---------|---------|--|
| Over Voltage Protection | | Limits output voltage at no load and in case the normal voltage limit fails. | | | |
| Short Circuit Protection | | Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed. | | | |
| Over Temperature Protection | | Decreases output current, returning to normal after over temperature is removed. | | | |
| Input Under Voltage Protection (IUV) | Input Under Voltage Protection | 70 Vac | 80 Vac | 90 Vac | Turn off the output when the input voltage falls below protection voltage. |
| | Input Under Voltage Recovery | 75 Vac | 85 Vac | 95 Vac | Auto Recovery. The driver will restart when the input voltage exceeds recovery voltage. |
| Input Over Voltage Protection (IOVP) | Input Over Voltage Protection | 310 Vac | 320 Vac | 330 Vac | Turn off the output when the input voltage exceeds protection voltage. |
| | Input Over Voltage Recovery | 300 Vac | 310 Vac | 320 Vac | Auto Recovery. The driver will restart when the input voltage falls below recovery voltage. |
| | Max. of Input Over Voltage | - | - | 350 Vac | The driver can survive stabilized input over voltage conditions up to 350Vac for a total of 8 hours. |

● Input Under Voltage Protection Diagram

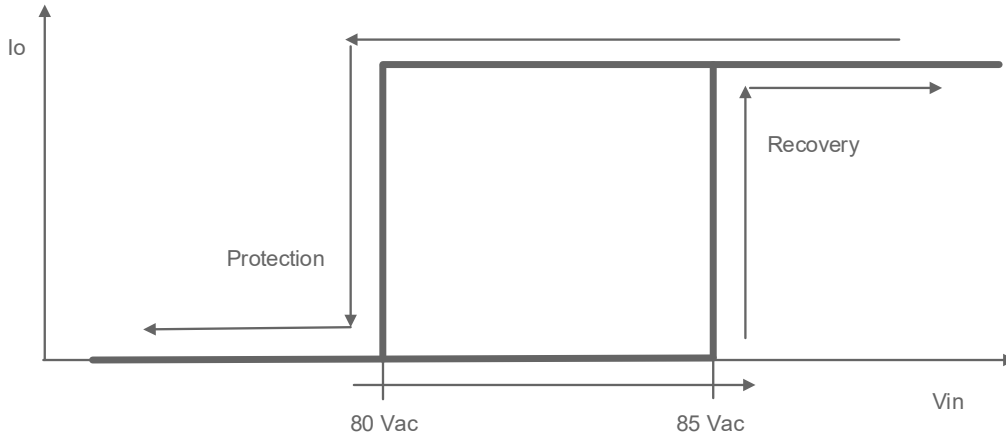



● Input Over Voltage Protection Diagram

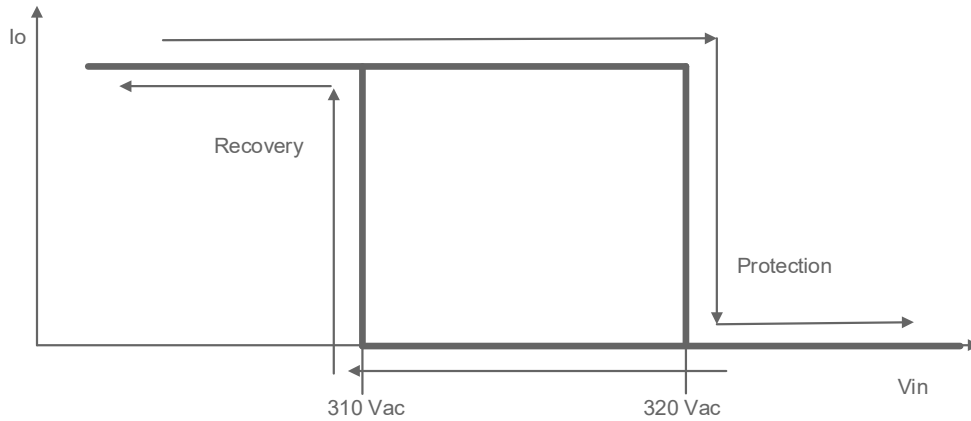



Dimming

● 0-10V Dimming

The recommended implementation of the dimming control is provided below.

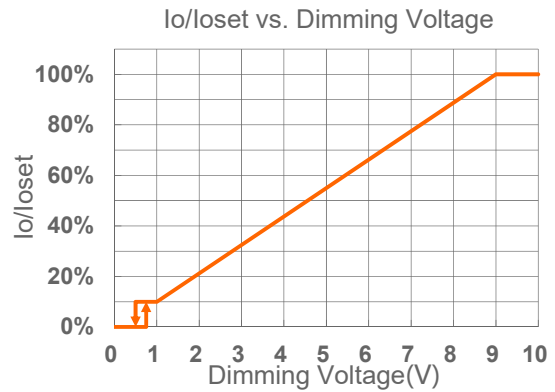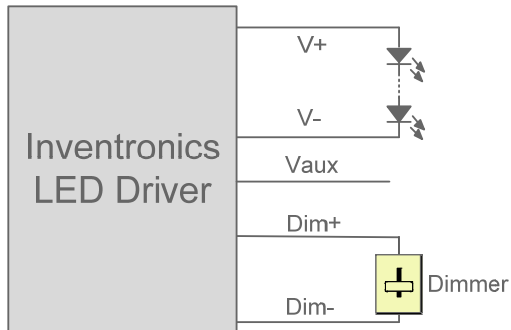

Implementation 1: Positive logic

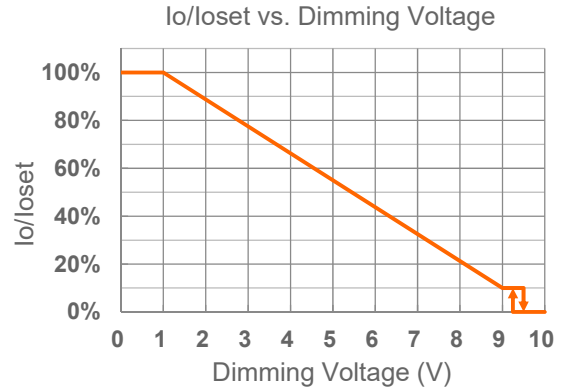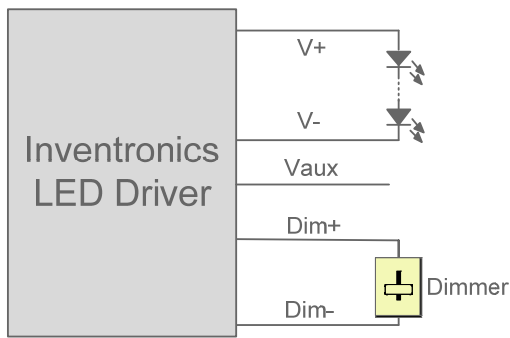



Implementation 2: Negative logic

Notes:



1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like zener.
3. When 0-10V negative logic dimming mode and Dim+ is open, the driver will dim to off and be standby.

● PWM Dimming

The recommended implementation of the dimming control is provided below.

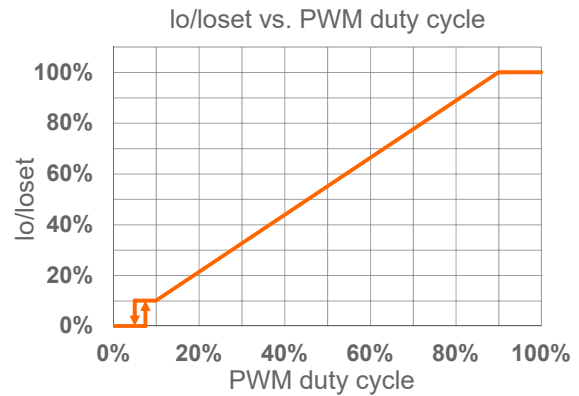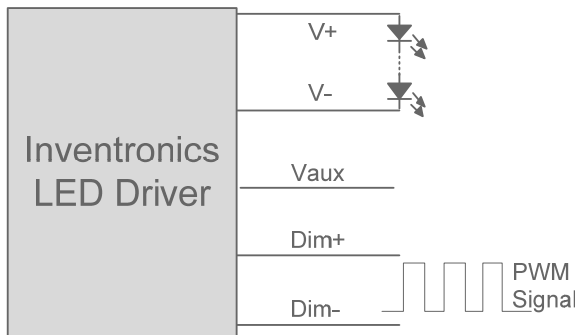

Implementation 3: Positive logic

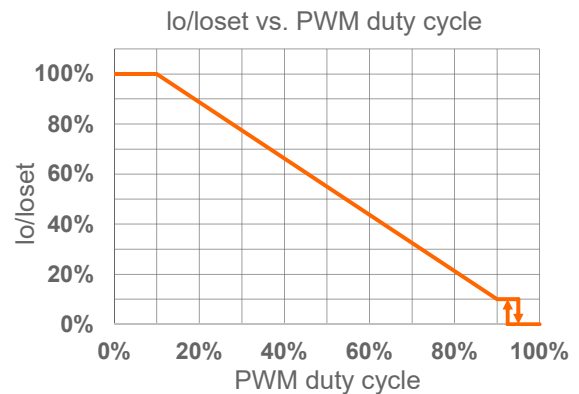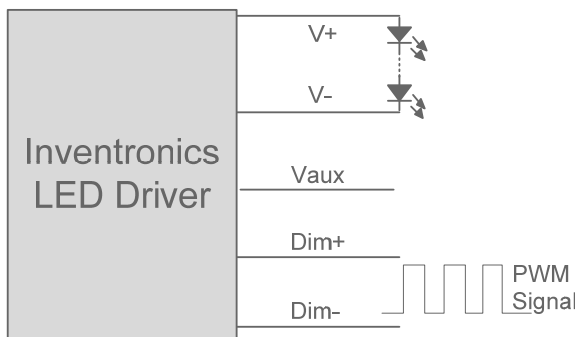

Implementation 4: Negative logic

Notes:

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. When PWM negative logic dimming mode and Dim+ is open, the driver will dim to off and be standby.

● **Time Dimming**

Time dimming control includes 3 kinds of modes, they are Self Adapting-Midnight, Self Adapting-Percentage and Traditional Timer.

- **Self Adapting-Midnight:** Automatically adjusts the dimming curve based on the on-time of past two days (if difference <15 minutes), assuming that the center point of the dimming curve is midnight local time.
- **Self Adapting-Percentage:** Automatically adjusts the on-time of each step by a constant percentage = (actual on-time for the past 2 days if difference <15 min) / (programmed on-time from the dimming curve).
- **Traditional Timer:** Follows the programmed timing curve after power on with no changes.

● **Output Lumen Compensation**

Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation.


● **End Of Life**

End-of-Life (EOL) is providing a visual notification to a user that the LED module has reached the end of manufacturer-specified life and that the replacement is recommended. Once active, an indication is given at each power-up of the driver, which the driver indicates this through a lower light output during the first 1 minute before normal operation is continued.

● **Digital Dimming**

Inventronics Digital Dimming is a UART (Universal Asynchronous Receive Transmitter) based communication protocol. Please refer to [Inventronics Digital Dimming](#) file for details.

Programming Connection Diagram

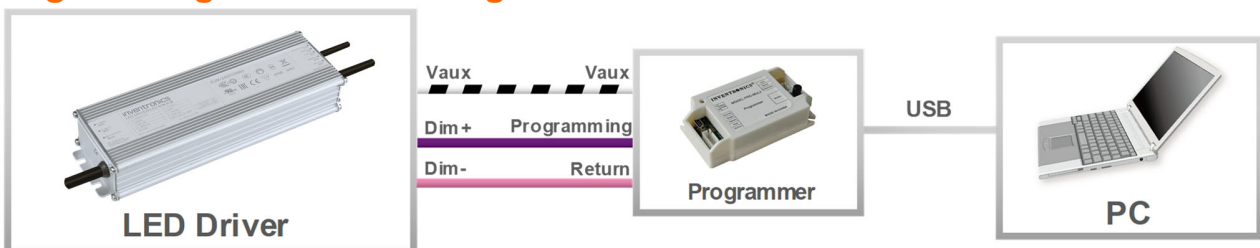


Note: The driver does not need to be powered on during the programming process.


- Please refer to [PRG-MUL2](#) (Programmer) datasheet for details.

Mechanical Outline


EUM-240SxxxMG

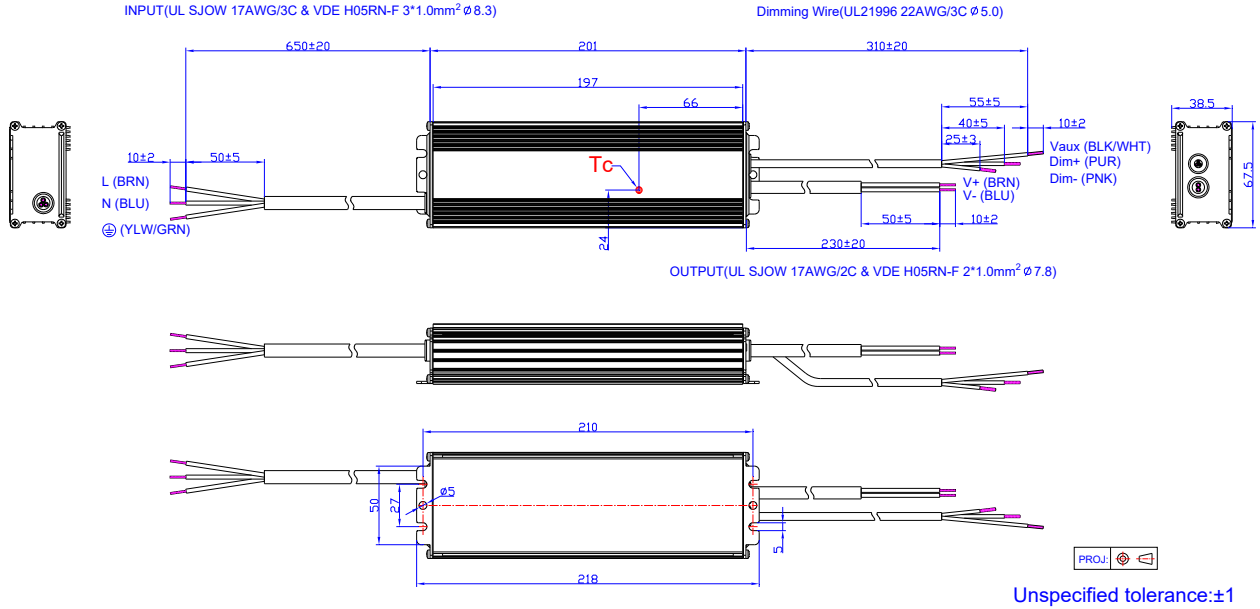

EUM-240SxxxMT

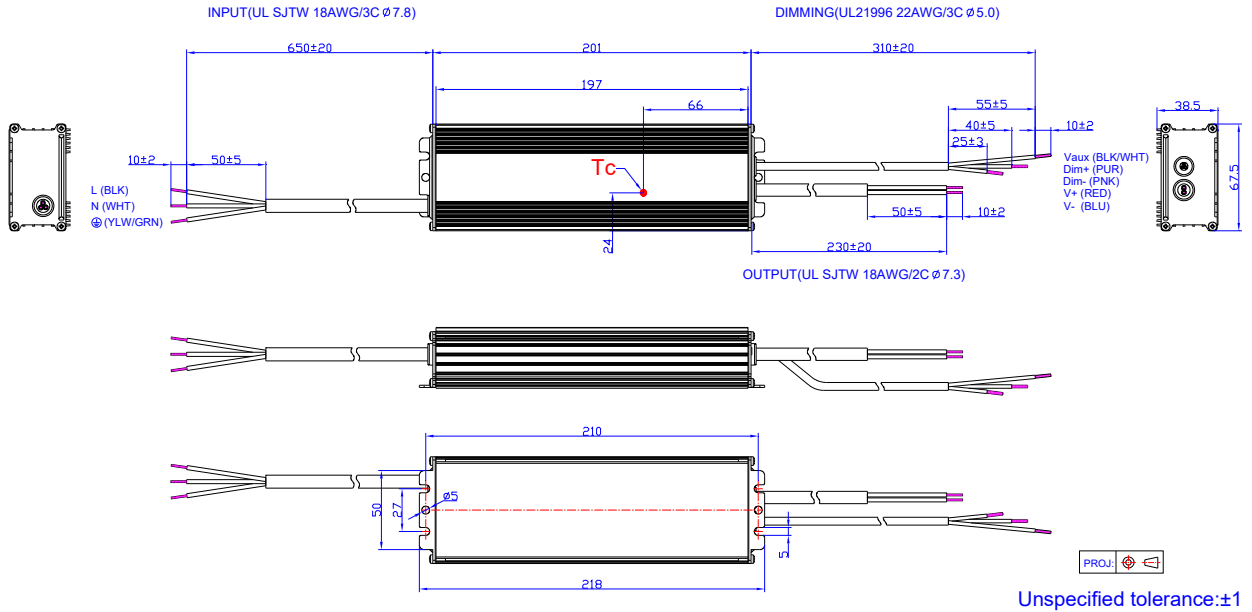

EUM-240SxxxMB

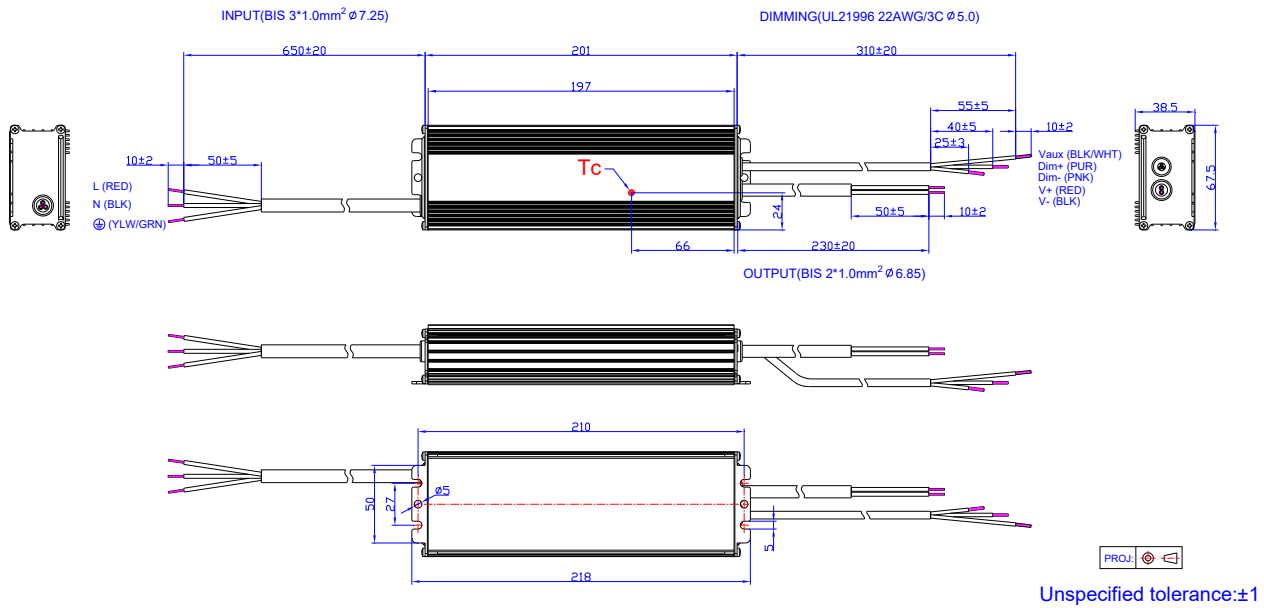

RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

| Change Date | Rev. | Description of Change | | |
|-------------|------|--------------------------------|---------------|---------|
| | | Item | From | To |
| 2020-10-22 | A | Datasheet Release | / | / |
| 2021-12-17 | B | UKCA logo | / | Added |
| | | EAC logo | / | Added |
| | | Safety & EMC Compliance | UKCA | Added |
| | | Safety & EMC Compliance | EAC | Added |
| | | Programming Connection Diagram | EUM-240SxxxMT | Updated |
| | | Mechanical Outline | EUM-240SxxxMT | Updated |
| 2023-07-14 | C | Product Photograph | / | Updated |
| | | NOM/SAA logo | / | Added |
| | | Safety & EMC Compliance | / | Updated |
| | | Dimming | / | Updated |
| | | Programming Connection Diagram | / | Updated |
| | | Mechanical Outline | / | Updated |
| 2024-11-26 | D | Format | / | Updated |
| | | Product Photograph | / | Updated |
| | | UKCA logo | / | Deleted |
| | | BIS logo | / | Added |
| | | Models | Notes (4) | Updated |
| | | Safety & EMC Compliance | / | Updated |
| | | Inrush Current Waveform | / | Updated |
| | | Mechanical Outline | / | Updated |