

Features

- Ultra High Efficiency (Up to 96%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Isolated 0-10V/PWM/3-Timer-Modes Dimmable
- Adjustable Dimming Curve
- INV Digital Dimming, UART Based Communication Protocol
- Dim-to-Off with Standby Power $\leq 0.5W$
- Minimum Dimming Level with 5% or 10% Selectable
- Hold Time Adjustable
- Fade Time Adjustable
- Always-on Auxiliary Power: 12Vdc, 250mA
- Low Inrush Current
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IOVP, IUVP, OVP, SCP, OTP
- IP66/IP67 and UL Dry/Damp/Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5 Years Warranty



Description





The EUM-680SxxxMx series is a 680W, constant-current, programmable and IP66/IP67 rated LED driver that operates from 90-305Vac input with excellent power factor. Created for many lighting applications including high mast, sports, UV-LED, aquaculture and horticulture, etc. It provides an auxiliary voltage and dim-to-off functionality for powering low voltage, wireless controls. The dimming control supports 0-10V dimming as well as two-way communication via Digital Dimming, a UART based communication protocol. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, input under voltage, input over voltage, output over voltage, short circuit, and over temperature.



Models

Adjustable Output Current Range (A)	Full-Power Current Range (A) ⁽¹⁾	Default Output Current (A)	Output Voltage Range (Vdc)	Max. Output Power (W)	Typical Efficiency ⁽²⁾	Typical Power Factor		Model Number ^{(3) (4) (5)}
						120Vac	220Vac	
0.125-1.7	1.25-1.7	1.7	200-544	680	95.5%	0.99	0.96	EUM-680S170Mx
0.18-2.4	1.8-2.4	2.1	141.5-378	680	94.5%	0.99	0.96	EUM-680S240Mx
0.26-3.5	2.6-3.5	3.5	97.1-262	680	95.0%	0.99	0.96	EUM-680S350Mx
0.42-5.6	4.2-5.6	5.6	60.7-163	680	94.5%	0.99	0.96	EUM-680S560Mx
0.63-8.4	6.3-8.4	8.4	40.4-108	680	95.0%	0.99	0.96	EUM-680S840Mx ⁽⁶⁾
1.26-15.0	12.6-15.0	15.0	22.6-54	680	95.5%	0.99	0.96	EUM-680S15AMx ⁽⁶⁾

- Notes:** (1) Output current range with constant power at 680W.
 (2) Measured at 100% load and 220Vac input (see below “General Specifications” for details).
 (3) Certified input voltage range: UL, FCC 100-277Vac; otherwise 100-240Vac
 (4) x = G are UL Recognized, ENEC and CCC, etc. models; x = T are UL Class P models, x = B are BIS models.
 (5) All the models are certificated to BIS, except EUM-680S15AMB.
 (6) SELV output

I-V Operation Area

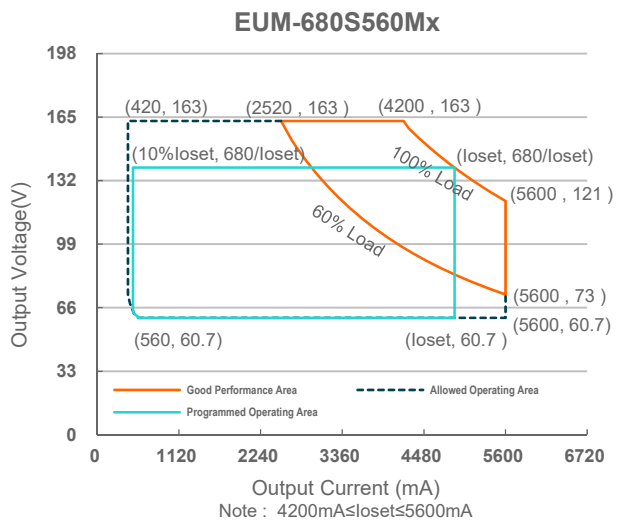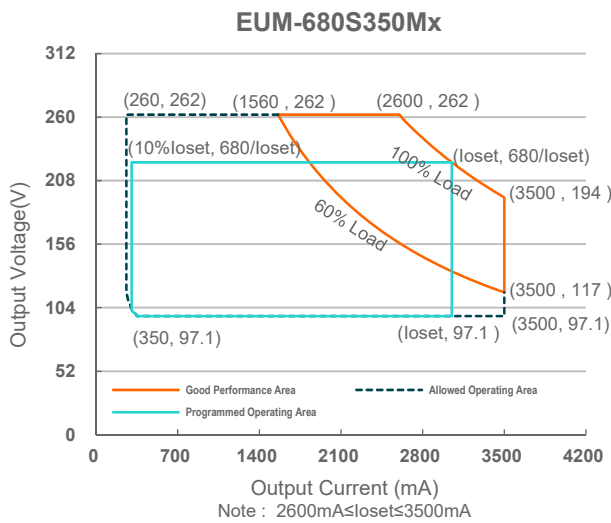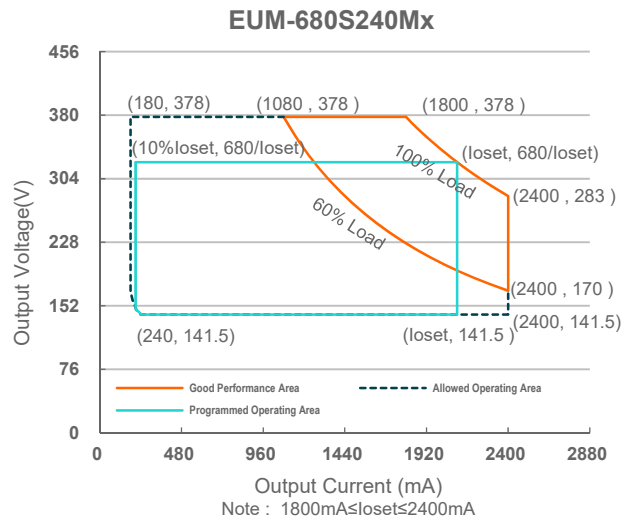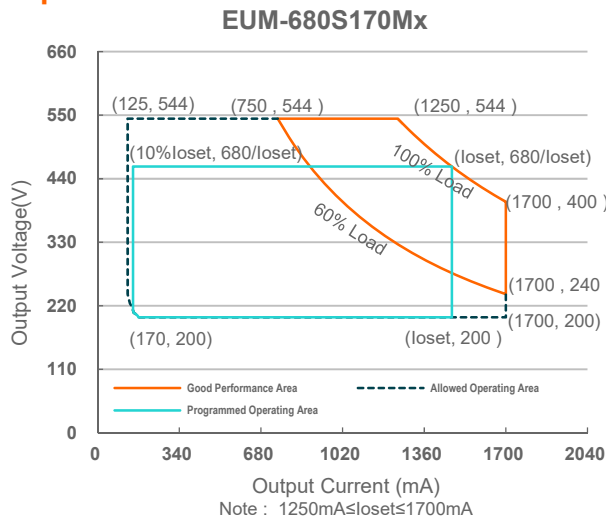

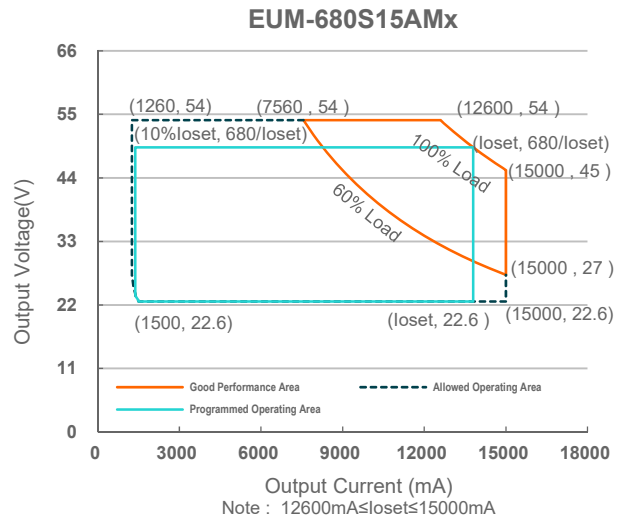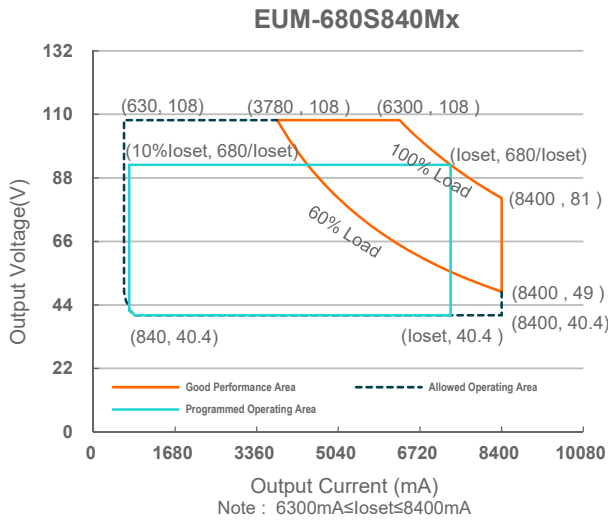

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input AC Voltage	90 Vac	-	305 Vac	
Input DC Voltage	127 Vdc	-	300 Vdc	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 MIU	UL 8750; 277Vac/60Hz
	-	-	0.70 mA	IEC 60598-1; 240Vac/60Hz
Input AC Current	-	-	6.9 A	Measured at 100% load and 120 Vac input.
	-	-	3.6 A	Measured at 100% load and 220 Vac input.
Inrush Current(I ² t)	-	-	2.1 A ² s	At 220Vac input, 25°C cold start, duration=14.2 ms, 10% peak-10% peak.
PF	0.90	-	-	At 100-277Vac, 50-60Hz, 60%-100% Load (408 - 680W)
THD	-	-	20%	
THD	-	-	10%	At 220-240Vac, 50-60Hz, 75%-100% Load (510 - 680W)

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%loset	-	5%loset	100% load
Output Current Setting(loset Range)				
EUM-680S170Mx	125 mA	-	1700 mA	
EUM-680S240Mx	180 mA	-	2400 mA	
EUM-680S350Mx	260 mA	-	3500 mA	
EUM-680S560Mx	420 mA	-	5600 mA	
EUM-680S840Mx	630 mA	-	8400 mA	
EUM-680S15AMx	1260 mA	-	15000 mA	
Output Current Setting Range with Constant Power				
EUM-680S170Mx	1250 mA	-	1700 mA	
EUM-680S240Mx	1800 mA	-	2400 mA	
EUM-680S350Mx	2600 mA	-	3500 mA	
EUM-680S560Mx	4200 mA	-	5600 mA	
EUM-680S840Mx	6300 mA	-	8400 mA	
EUM-680S15AMx	12600 mA	-	15000 mA	
Total Output Current Ripple (pk-pk)	-	5%lomax	10%lomax	100% load, 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	-	-	2%lomax	70%-100% load
Startup Overshoot Current	-	-	10%lomax	100% load
No Load Output Voltage				
EUM-680S170Mx	-	-	600 V	
EUM-680S240Mx	-	-	420 V	
EUM-680S350Mx	-	-	300 V	
EUM-680S560Mx	-	-	200 V	
EUM-680S840Mx	-	-	120 V	
EUM-680S15AMx	-	-	60 V	
Line Regulation	-	-	±0.5%	100% load
Load Regulation	-	-	±3.0%	
Turn-on Delay Time	-	-	0.5 s	Measured at 120-277Vac input, 60%-100% Load
Temperature Coefficient of loset	-	0.03%/°C	-	Case temperature = 0°C ~Tc max
12V Auxiliary Output Voltage	10.8 V	12 V	13.2 V	
12V Auxiliary Output Source Current	0 mA	-	250 mA	Return terminal is "Dim"
12V Auxiliary Output Transient Peak Current@6W	-	-	500 mA	500mA peak for a maximum duration of 2.2ms in a 6.0ms period during which time the average should not exceed 250mA.
12V Auxiliary Output Transient Peak Current@10W	-	-	850 mA	850mA peak for a maximum duration of 1.3ms in a 5.2ms period during which time the average should not exceed 250mA.

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input:				
EUM-680S170Mx				
lo= 1250 mA	92.0%	94.0%	-	
lo= 1700 mA	92.0%	94.0%	-	
EUM-680S240Mx				
lo= 1800 mA	90.5%	92.5%	-	
lo= 2400 mA	90.0%	92.0%	-	
EUM-680S350Mx				
lo= 2600 mA	90.0%	92.0%	-	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
lo= 3500 mA	90.5%	92.5%	-	
EUM-680S560Mx				
lo= 4200 mA	90.0%	92.0%	-	
lo= 5600 mA	90.0%	92.0%	-	
EUM-680S840Mx				
lo= 6300 mA	90.5%	92.5%	-	
lo= 8400 mA	90.5%	92.5%	-	
EUM-680S15AMx				
lo= 12600 mA	92.0%	94.0%	-	
lo= 15000 mA	92.0%	94.0%	-	
Efficiency at 220 Vac input:				
EUM-680S170Mx				
lo= 1250 mA	93.5%	95.5%	-	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
lo= 1700 mA	93.5%	95.5%	-	
EUM-680S240Mx				
lo= 1800 mA	92.5%	94.5%	-	
lo= 2400 mA	92.5%	94.5%	-	
EUM-680S350Mx				
lo= 2600 mA	92.5%	94.5%	-	
lo= 3500 mA	93.0%	95.0%	-	
EUM-680S560Mx				
lo= 4200 mA	92.5%	94.5%	-	
lo= 5600 mA	92.5%	94.5%	-	
EUM-680S840Mx				
lo= 6300 mA	93.0%	95.0%	-	
lo= 8400 mA	93.0%	95.0%	-	
EUM-680S15AMx				
lo= 12600 mA	93.5%	95.5%	-	
lo= 15000 mA	93.5%	95.5%	-	
Efficiency at 277 Vac input:				
EUM-680S170Mx				
lo= 1250 mA	93.5%	95.5%	-	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
lo= 1700 mA	93.5%	95.5%	-	
EUM-680S240Mx				
lo= 1800 mA	93.0%	95.0%	-	
lo= 2400 mA	93.0%	95.0%	-	
EUM-680S350Mx				
lo= 2600 mA	93.0%	95.0%	-	
lo= 3500 mA	93.5%	95.5%	-	
EUM-680S560Mx				
lo= 4200 mA	93.0%	95.0%	-	
lo= 5600 mA	93.0%	95.0%	-	
EUM-680S840Mx				
lo= 6300 mA	93.0%	95.0%	-	
lo= 8400 mA	93.0%	95.0%	-	
EUM-680S15AMx				
lo= 12600 mA	94.0%	96.0%	-	
lo= 15000 mA	94.0%	96.0%	-	

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Standby Power	-	-	0.5 W	Measured at 230Vac/50Hz; Dimming off
MTBF	-	201,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	107,000 Hours	-	Measured at 220Vac input, 80%Load and 70°C case temperature; See lifetime vs. Tc curve for the details
	-	67,000 Hours	-	Measured at 220Vac input, 100%Load and 40°C ambient temperature
Operating Case Temperature for Safety Tc _s	-40°C	-	+90°C	
Operating Case Temperature for Warranty Tc _w	-40°C	-	+80°C	Case temperature for 5 years warranty Humidity: 10%RH to 95%RH
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 95%RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	9.84 × 5.31 × 1.81 250 × 135 × 46			With mounting ear 10.83 × 5.31 × 1.81 275 × 135 × 46
Net Weight	-	3079 g	-	

Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes	
Absolute Maximum Voltage on the Vdim (+) Pin	-20 V	-	20 V		
Source Current on Vdim (+) Pin	200 uA	300 uA	450 uA	Vdim(+) = 0 V	
Dimming Output Range with 10%-100% (Default)	EUM-680S170Mx EUM-680S240Mx EUM-680S350Mx EUM-680S560Mx EUM-680S840Mx EUM-680S15AMx	10%loset	-	loset	1250 mA ≤ loiset ≤ 1700 mA 1800 mA ≤ loiset ≤ 2400 mA 2600 mA ≤ loiset ≤ 3500 mA 4200 mA ≤ loiset ≤ 5600 mA 6300 mA ≤ loiset ≤ 8400 mA 12600 mA ≤ loiset ≤ 15000 mA
	EUM-680S170Mx EUM-680S240Mx EUM-680S350Mx EUM-680S560Mx EUM-680S840Mx EUM-680S15AMx	125 mA 180 mA 260 mA 420 mA 630 mA 1260 mA	-	loset	125 mA ≤ loiset < 1250 mA 180 mA ≤ loiset < 1800 mA 260 mA ≤ loiset < 2600 mA 420 mA ≤ loiset < 4200 mA 630 mA ≤ loiset < 6300 mA 1260 mA ≤ loiset < 12600 mA
Dimming Output Range with 5%-100% (Settable)	EUM-680S170Mx EUM-680S240Mx EUM-680S350Mx EUM-680S560Mx EUM-680S840Mx EUM-680S15AMx	5%loset	-	loset	1250 mA ≤ loiset ≤ 1700 mA 1800 mA ≤ loiset ≤ 2400 mA 2600 mA ≤ loiset ≤ 3500 mA 4200 mA ≤ loiset ≤ 5600 mA 6300 mA ≤ loiset ≤ 8400 mA 12600 mA ≤ loiset ≤ 15000 mA
	EUM-680S170Mx EUM-680S240Mx EUM-680S350Mx EUM-680S560Mx EUM-680S840Mx EUM-680S15AMx	63 mA 90 mA 130 mA 210 mA 315 mA 630 mA	-	loset	125 mA ≤ loiset < 1250 mA 180 mA ≤ loiset < 1800 mA 260 mA ≤ loiset < 2600 mA 420 mA ≤ loiset < 4200 mA 630 mA ≤ loiset < 6300 mA 1260 mA ≤ loiset < 12600 mA

Dimming Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Recommended Dimming Input Range	0 V	-	10 V	Default 0-10V dimming mode.
Dim off Voltage	0.35 V	0.5 V	0.65 V	
Dim on Voltage	0.55 V	0.7 V	0.85 V	
Hysteresis	-	0.2 V	-	
PWM_in High Level	3 V	-	10 V	Dimming mode set to PWM in Inventronics Programming Software.
PWM_in Low Level	-0.3 V	-	0.6 V	
PWM_in Frequency Range	200 Hz	-	3 KHz	
PWM_in Duty Cycle	1%	-	99%	
PWM Dimming off (Positive Logic)	3%	5%	8%	
PWM Dimming on (Positive Logic)	5%	7%	10%	
PWM Dimming off (Negative Logic)	92%	95%	97%	
PWM Dimming on (Negative Logic)	90%	93%	95%	
Hysteresis	-	2%	-	

Safety & EMC Compliance


Safety Category	Standard
UL/CUL	UL 8750,CAN/CSA-C22.2 No. 250.13
ENEC & CE	EN 61347-1, EN 61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
CCC	GB 19510.1, GB 19510.14
NOM	NOM-058-SCFI
EAC	TP TC 004, TP TC 020
BIS	IS 15885(Part2/Sec13)
Performance	Standard
ENEC	EN IEC 62384

Safety & EMC Compliance (Continued)


EMI Standards	Notes
EN IEC 55015/GB/T 17743/KS C 9815 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN IEC 61000-3-2/GB 17625.1	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15 ⁽¹⁾	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired Operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 6 kV, Common Mode 10 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547/KS C 9547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.


Derating

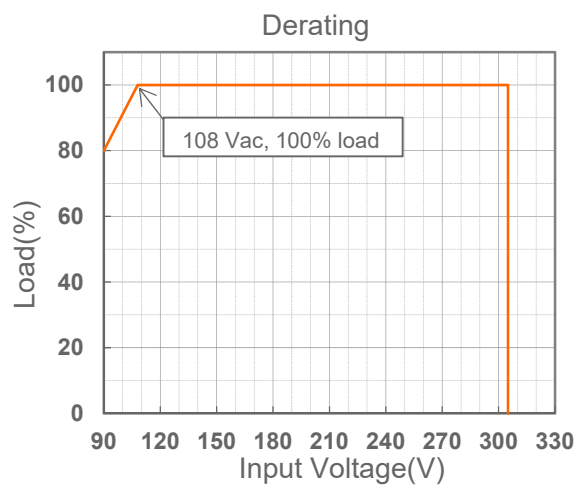

Lifetime vs. Case Temperature

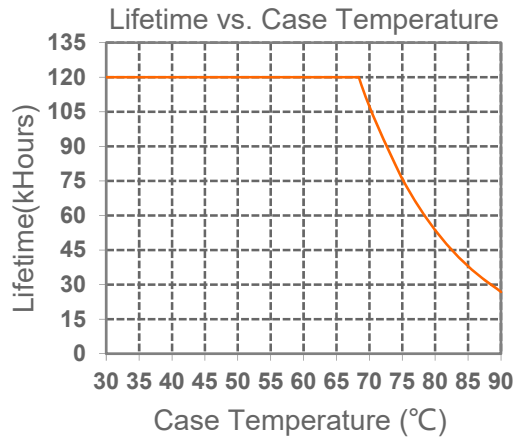







Inrush Current Waveform






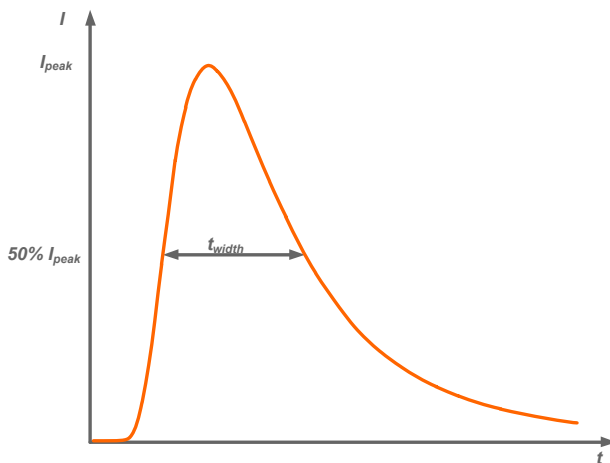


Input AC Voltage	I_{peak}	t_{width} (@ 50% I_{peak})
120Vac	7A	3.60ms
220Vac	14A	4.16ms
277Vac	16.7A	4.08ms


MCB	Tripping Curves	B	B	B	B	C	C	C	C
	Rated Current	10A	16A	20A	25A	10A	16A	20A	25A
The Number of LED Driver can be Configured	120Vac	0	1	1	2	1	1	2	2
	220Vac	1	2	3	4	2	3	4	5
	277Vac	1	3	3	4	2	4	5	6

Efficiency vs. Load

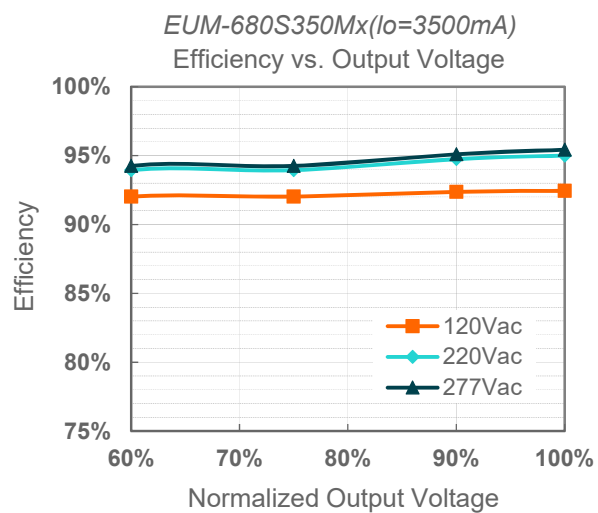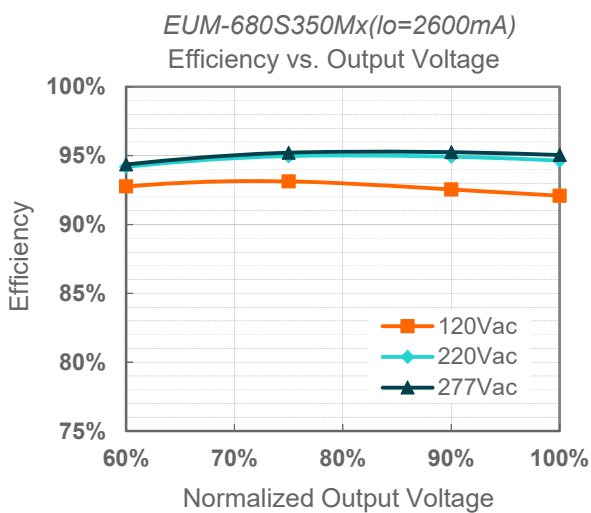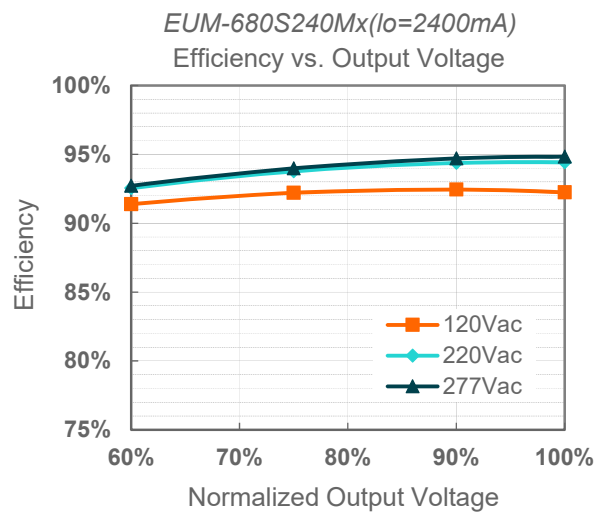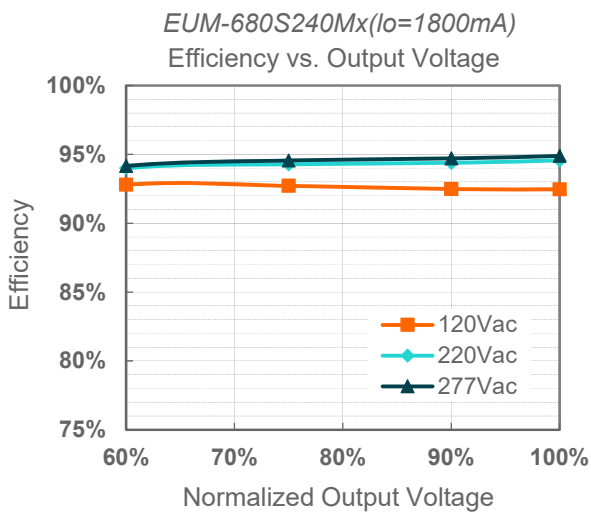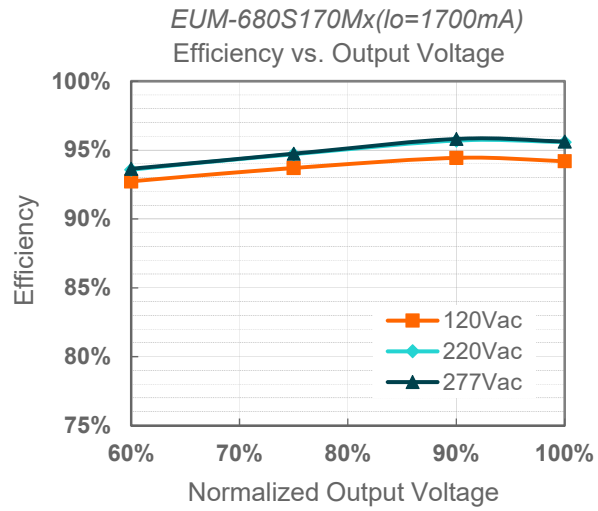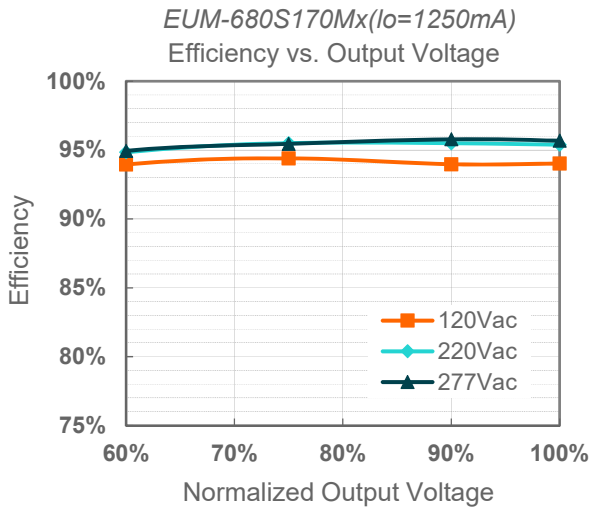


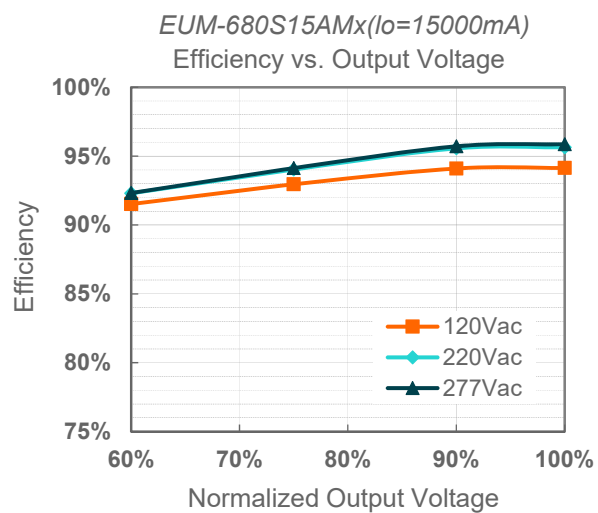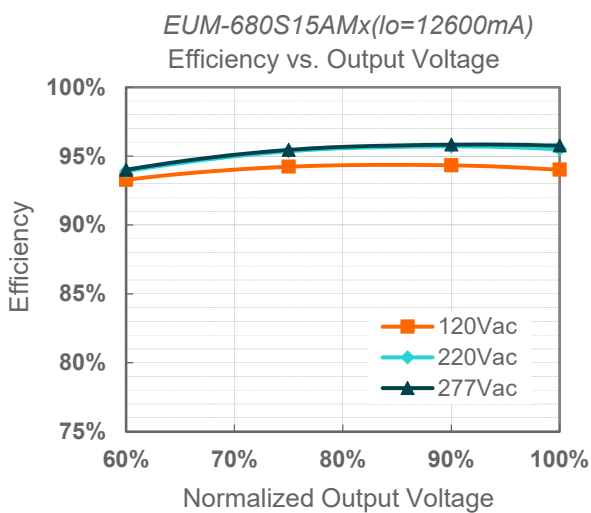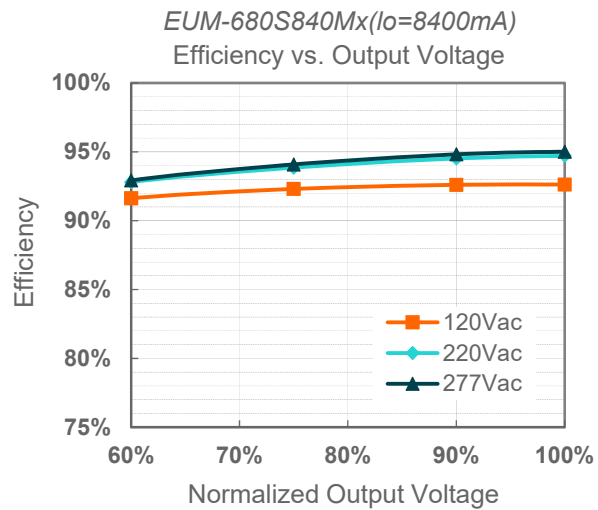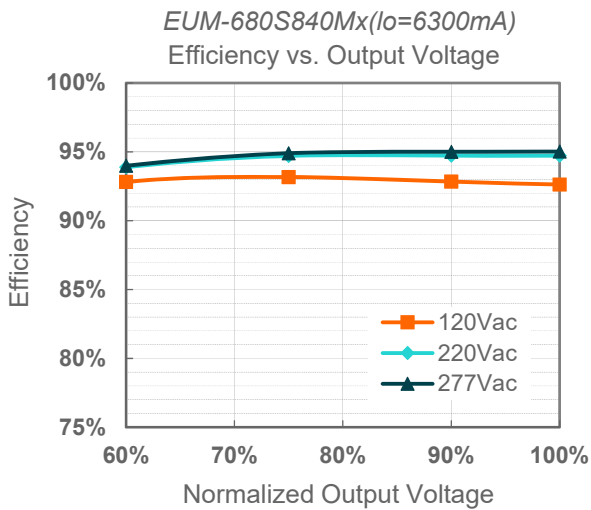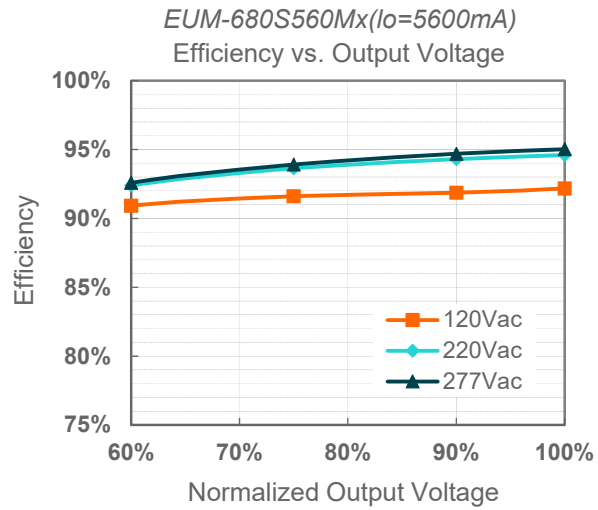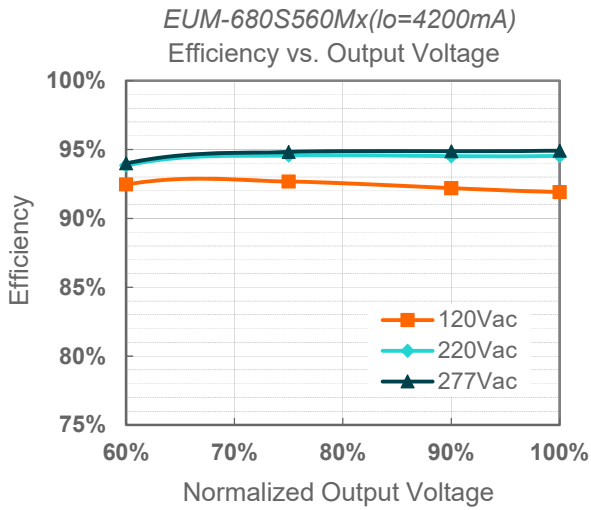

Power Factor

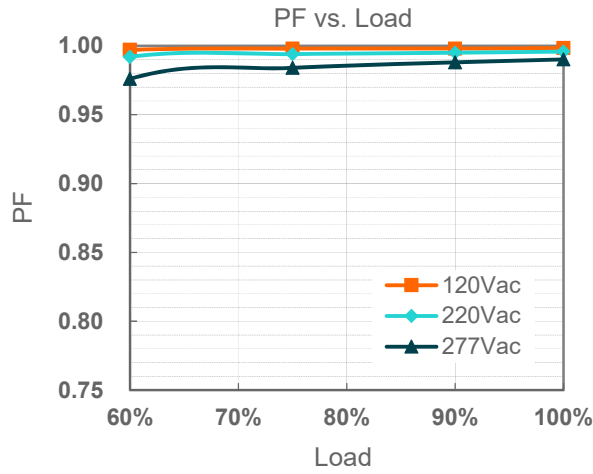

Total Harmonic Distortion

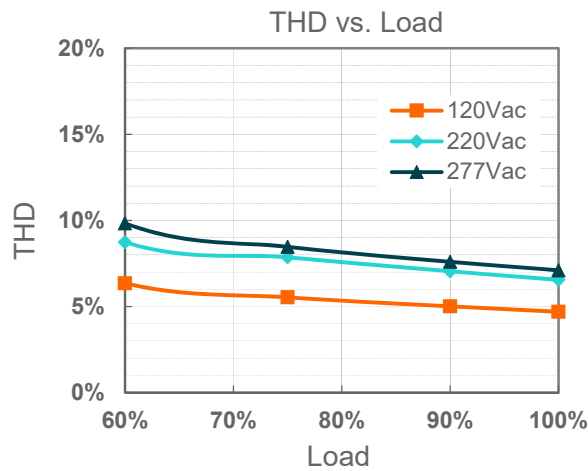


Protection Functions

Parameter		Min.	Typ.	Max.	Notes
Over Voltage Protection		Limits output voltage at no load and in case the normal voltage limit fails.			
Short Circuit Protection		Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.			
Over Temperature Protection		Decreases output current, returning to normal after over temperature is removed.			
Input Under Voltage Protection (IUVP)	Input Under Voltage Protection	70 Vac	80 Vac	90 Vac	Turn off the output when the input voltage falls below protection voltage.
	Input Under Voltage Recovery	75 Vac	85 Vac	95 Vac	Auto Recovery. The driver will restart when the input voltage exceeds recovery voltage.


Protection Functions (Continued)

Parameter		Min.	Typ.	Max.	Notes
Input Over Voltage Protection (IOVP)	Input Over Voltage Protection	310 Vac	320 Vac	330 Vac	Turn off the output when the input voltage exceeds protection voltage.
	Input Over Voltage Recovery	300 Vac	310 Vac	320 Vac	Auto Recovery. The driver will restart when the input voltage falls below recovery voltage.
	Max. of Input Over Voltage	-	-	350 Vac	The driver can survive for 8 hours with a stable input voltage stress of 350Vac.

● Input Under Voltage Protection Diagram

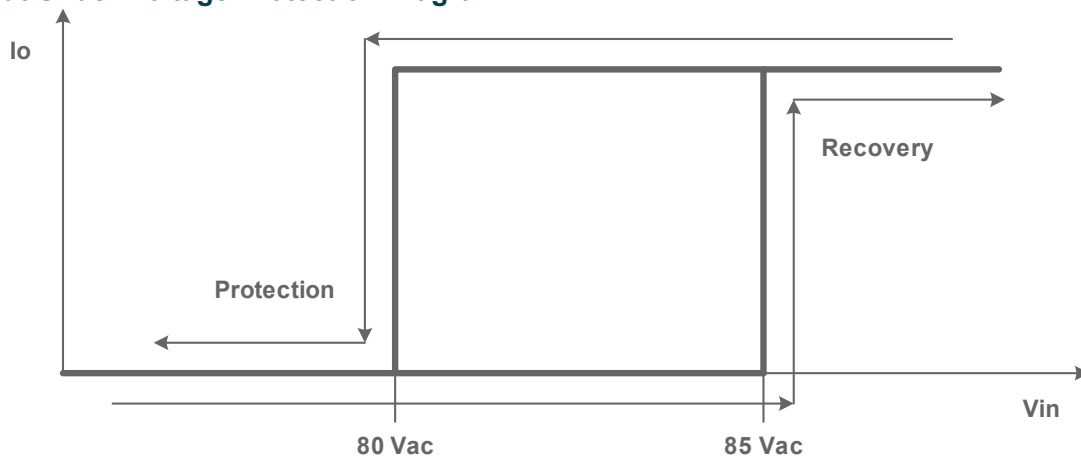



● Input Over Voltage Protection Diagram

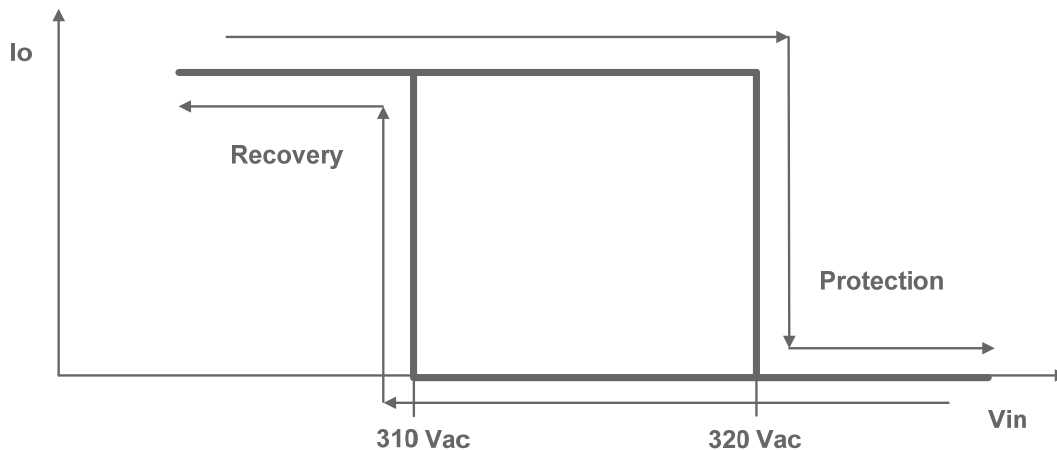



Dimming

● 0-10V Dimming

The recommended implementation of the dimming control is provided below.

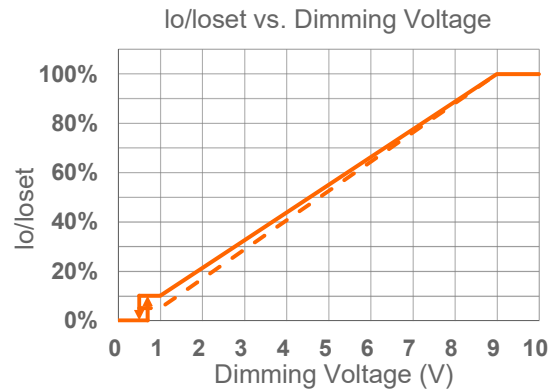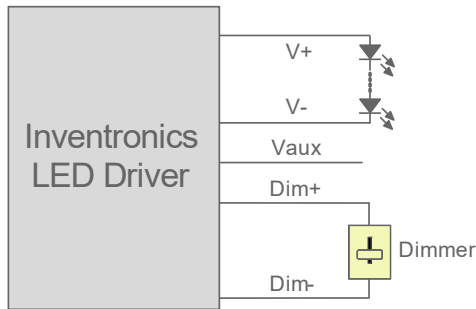

Implementation 1: Positive logic

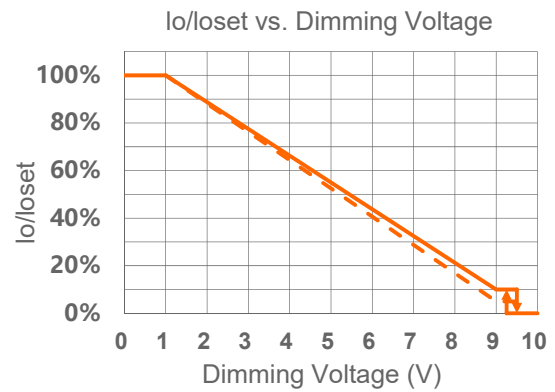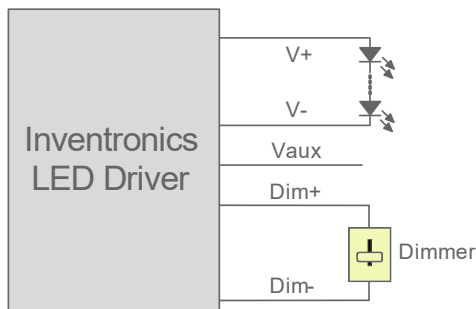



Implementation 2: Negative logic

Notes:



1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like zener.
3. When 0-10V negative logic dimming mode and Dim+ is open, the driver will dim to off and be standby.

● PWM Dimming

The recommended implementation of the dimming control is provided below.

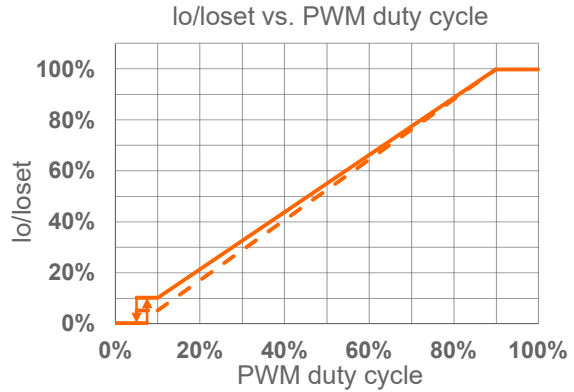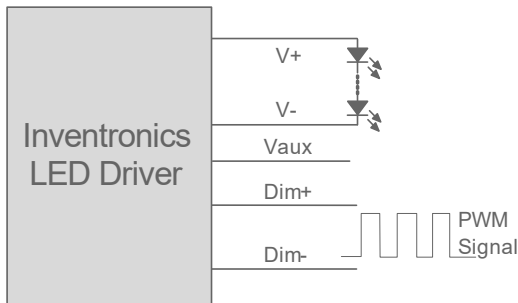

Implementation 3: Positive logic

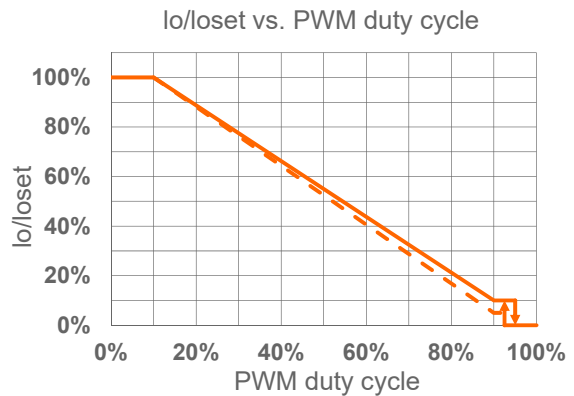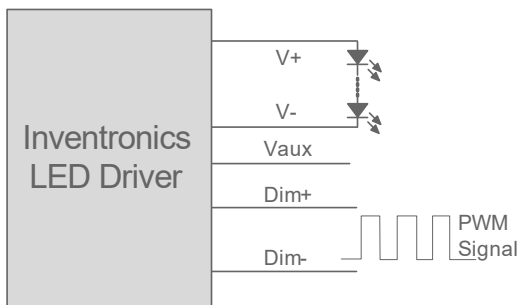



Implementation 4: Negative logic

Note:

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. When PWM negative logic dimming mode and Dim+ is open, the driver will dim to off and be standby.

● Adjustable Dimming Curve

0-10V dimming curve can be set as corresponding dimming voltage by Inventronics Multi Programmer. Take the positive logic dimming as an example, the recommended implementation of the dimming control is provided below.

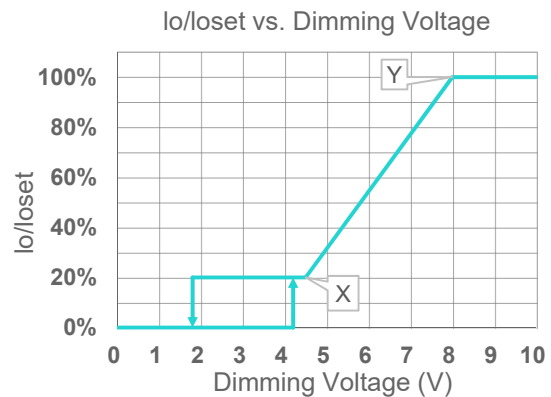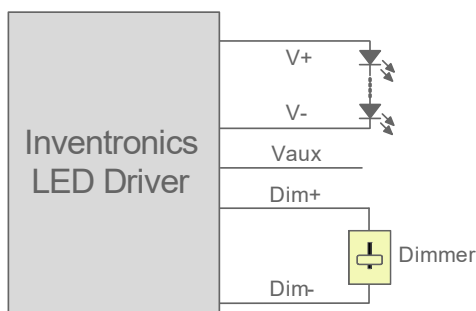

Implementation 5: Positive logic

Notes:

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like zener.
3. When dimming voltage X point is set to be smaller than Y point, the dimming curve is positive logic, conversely, when X point is set to be bigger than Y point, the dimming curve is negative logic.
4. For best dimming accuracy, the difference between X point and Y point is advised more than 4V.
5. Dimming off voltage adjustable.

● Time Dimming

Time dimming control includes 3 kinds of modes, they are Self Adapting-Midnight, Self Adapting-Percentage and Traditional Timer.

- **Self Adapting-Midnight:** Automatically adjusts the dimming curve based on the on-time of past two days (if difference <15 minutes), assuming that the center point of the dimming curve is midnight local time.
- **Self Adapting-Percentage:** Automatically adjusts the on-time of each step by a constant percentage = (actual on-time for the past 2 days if difference <15 min) / (programmed on-time from the dimming curve).
- **Traditional Timer:** Follows the programmed timing curve after power on with no changes.

● Output Lumen Compensation

Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation.

● Minimum Dimming Level with 5% or 10% Selectable

The minimum dimming level can be set as 5% or 10% by Inventronics Multi Programmer, 10% is default.

● Hold Time Adjustable

When AC power is first applied to the LED driver, enabling a “Hold” period can allow devices powered by the Auxiliary voltage to stabilize before the driver fades up to the maximum dimming level. During this period, the driver will not respond to external dimming commands but will respond again after the hold time ends. Both the initial dimming percentage and the duration of this hold period can be adjusted by the Inventronics Multi Programmer. This function is disabled by default

● Fade Time Adjustable

There is a “Fade” period after the “Hold” period. The soft-start time and dimming slope applied to all dimming transitions can be adjusted individually. It is adjusted by the Inventronics Multi Programmer. This function is disabled by default.


● End Of Life

End-of-Life (EOL) is providing a visual notification to a user that the LED module has reached the end of manufacturer-specified life and that the replacement is recommended. Once active, an indication is given at each power-up of the driver, which the driver indicates this through a lower light output during the first 1 minute before normal operation is continued.

● Digital Dimming

Inventronics Digital Dimming is a UART (Universal Asynchronous Receive Transmitter) based communication protocol. Please refer to [Inventronics Digital Dimming](#) file for details.

Programming Connection Diagram

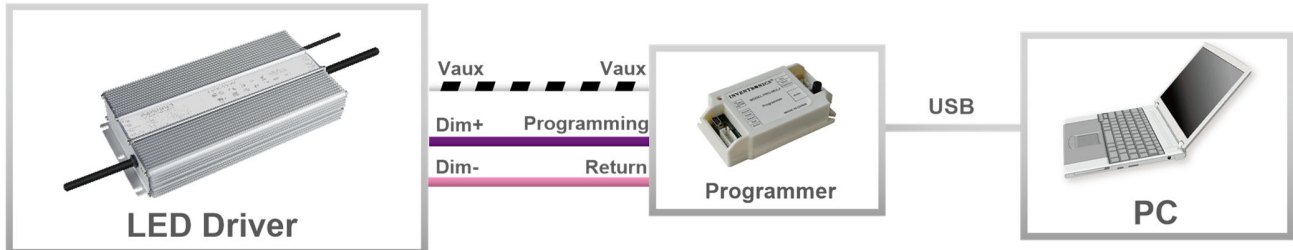


Note: The driver does not need to be powered on during the programming process.


- Please refer to [PRG-MUL2](#) (Programmer) datasheet for details.

Mechanical Outline


EUM-680S170MG/EUM-680S240MG

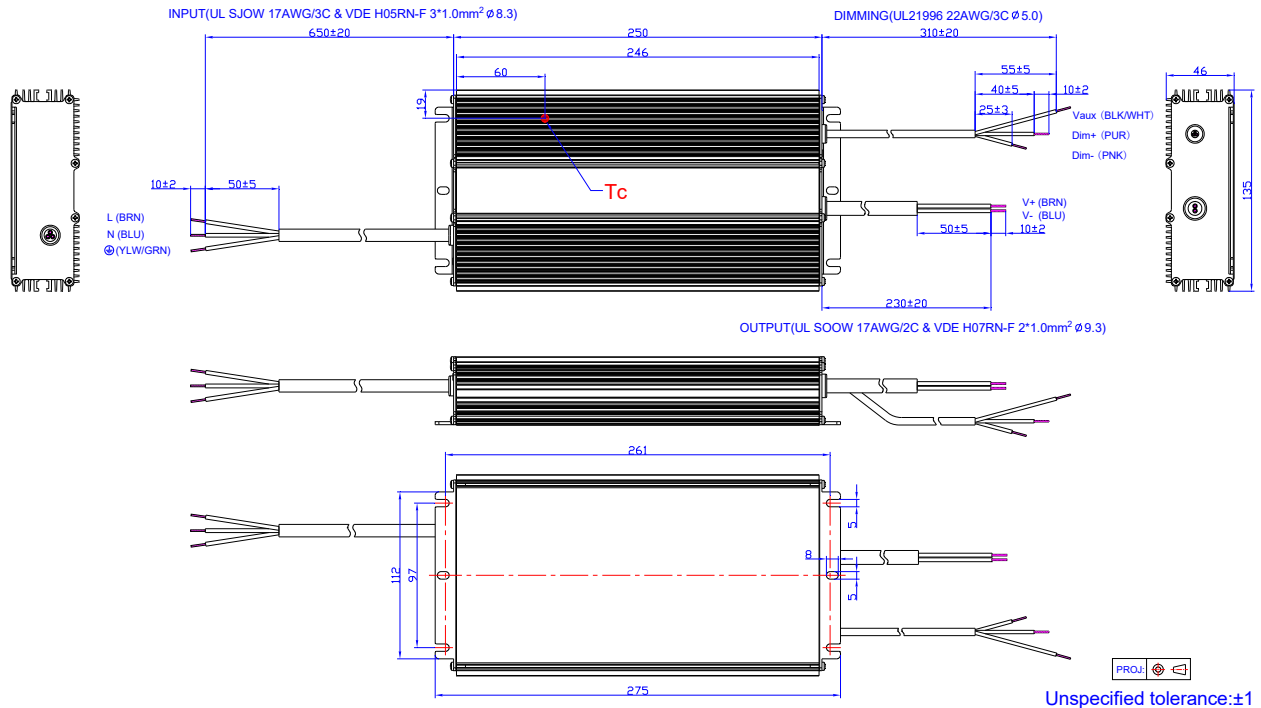


EUM-680S350MG/EUM-680S560MG/EUM-680S840MG

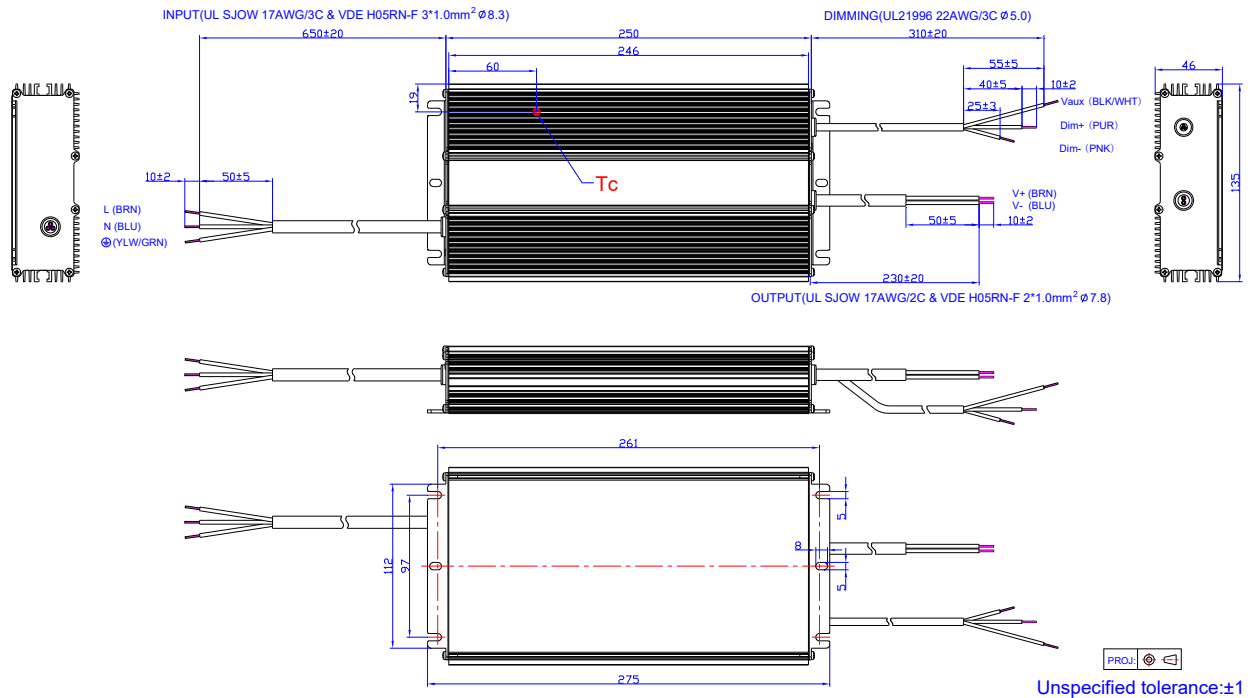


EUM-680S15AMG

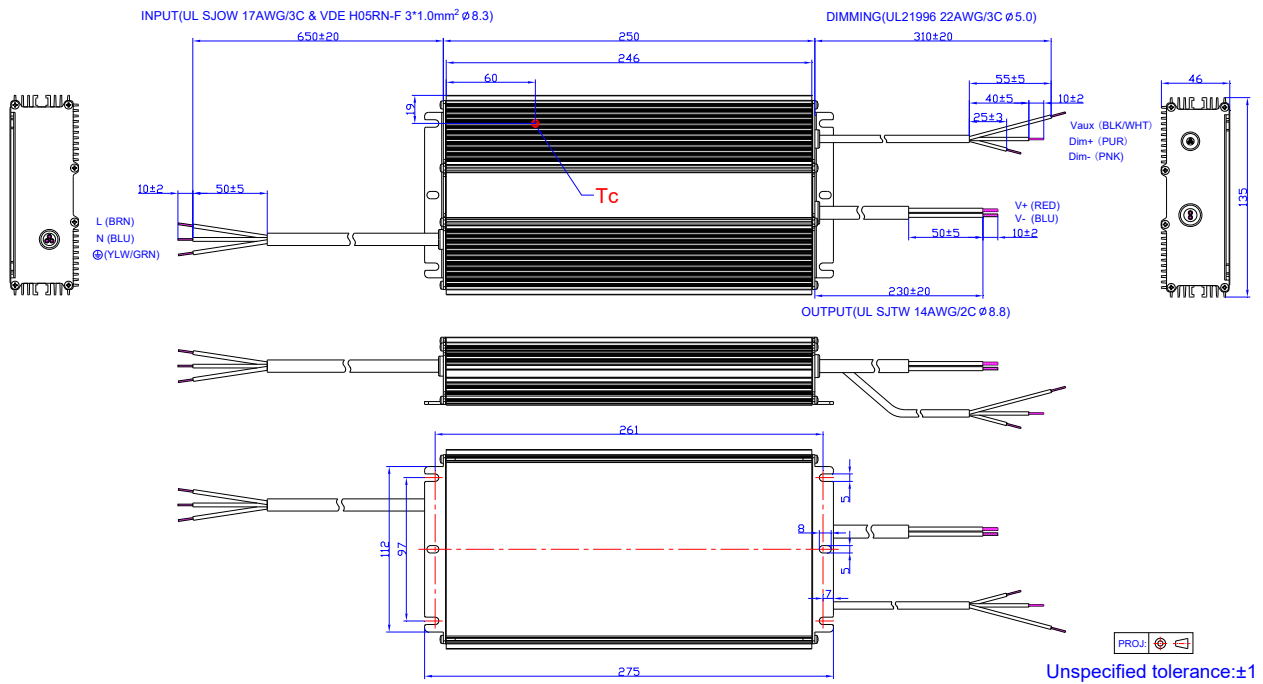


EUM-680S170MT/EUM-680S240MT

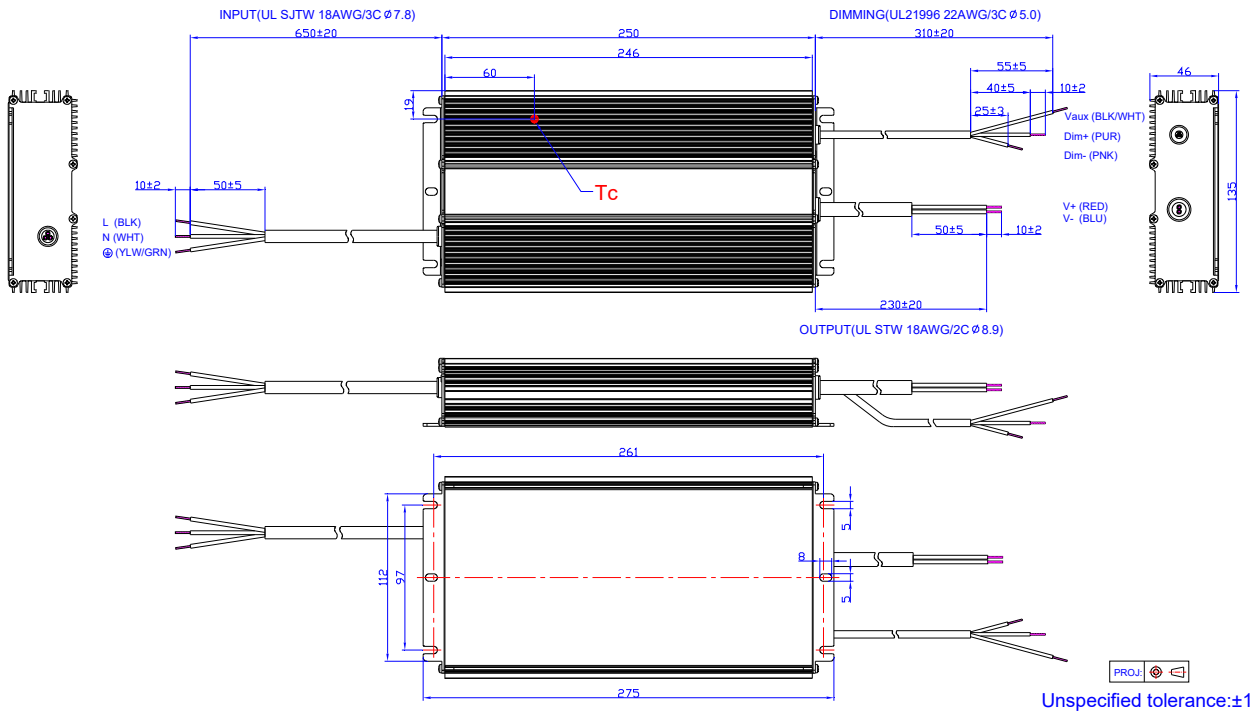


EUM-680S350MT/EUM-680S560MT/EUM-680S840MT

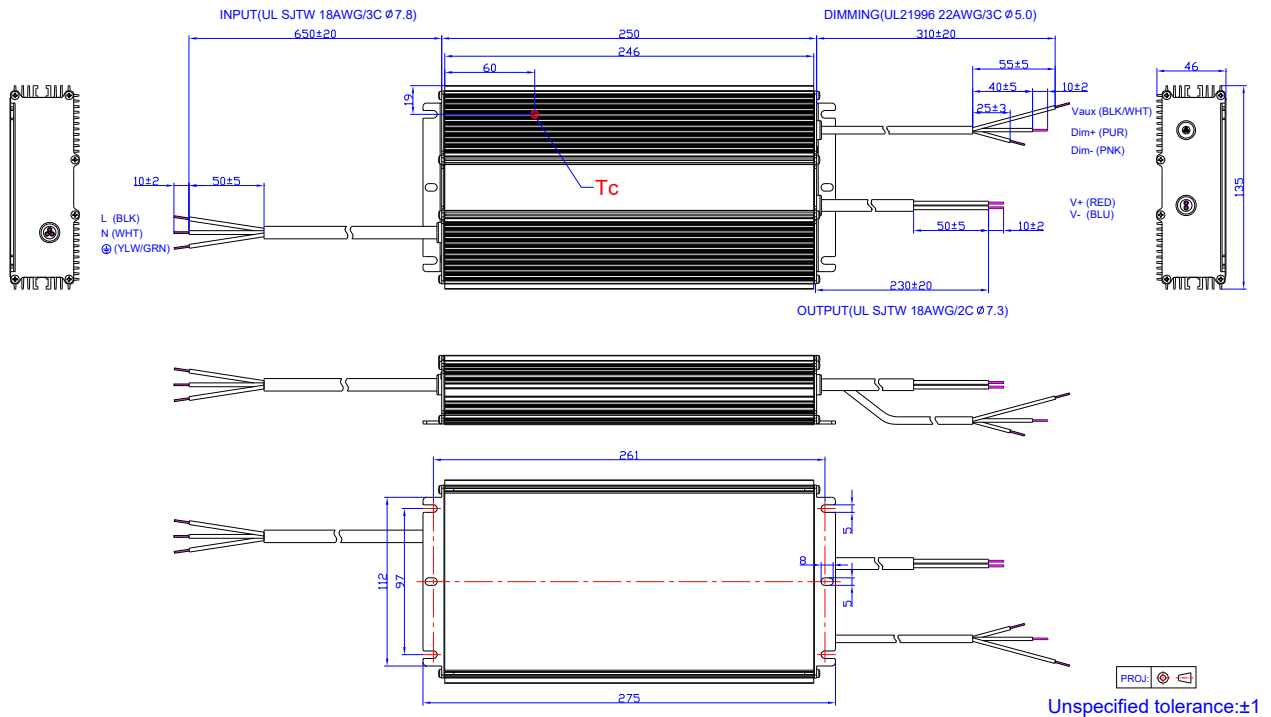

EUM-680S15AMT

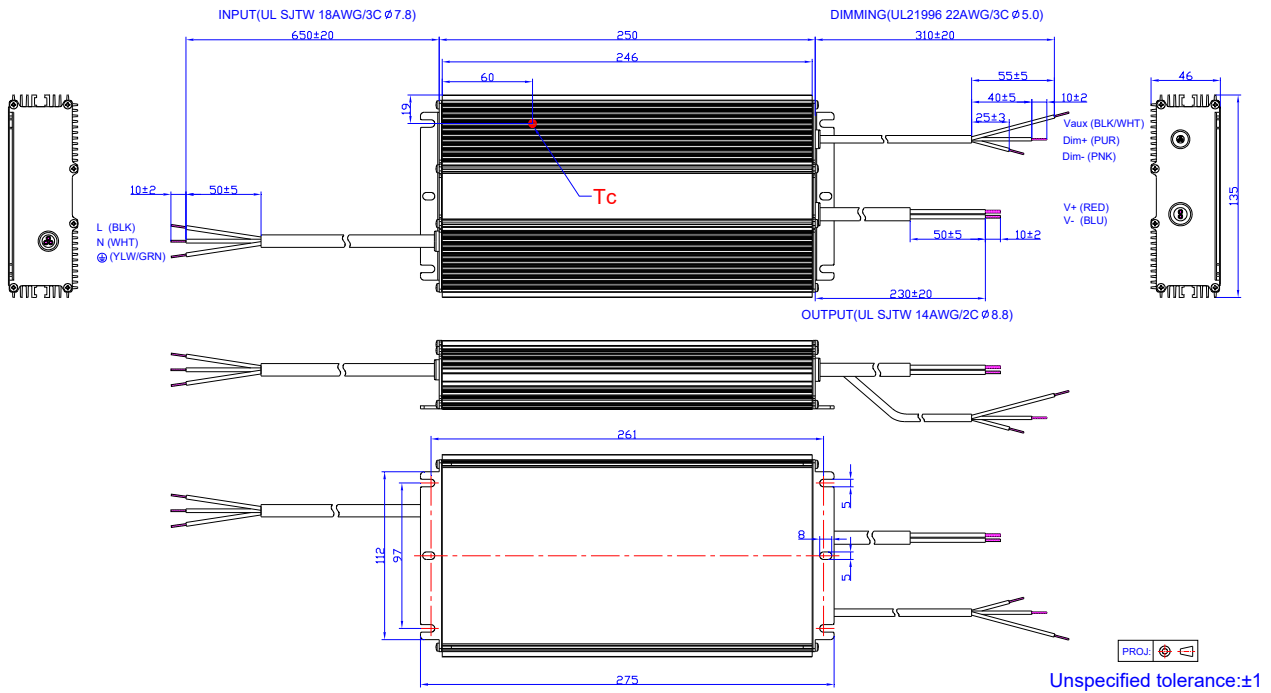

EUM-680S170MB/EUM-680S240MB/EUM-680S350MB/EUM-680S560MB/EUM-680S840MB

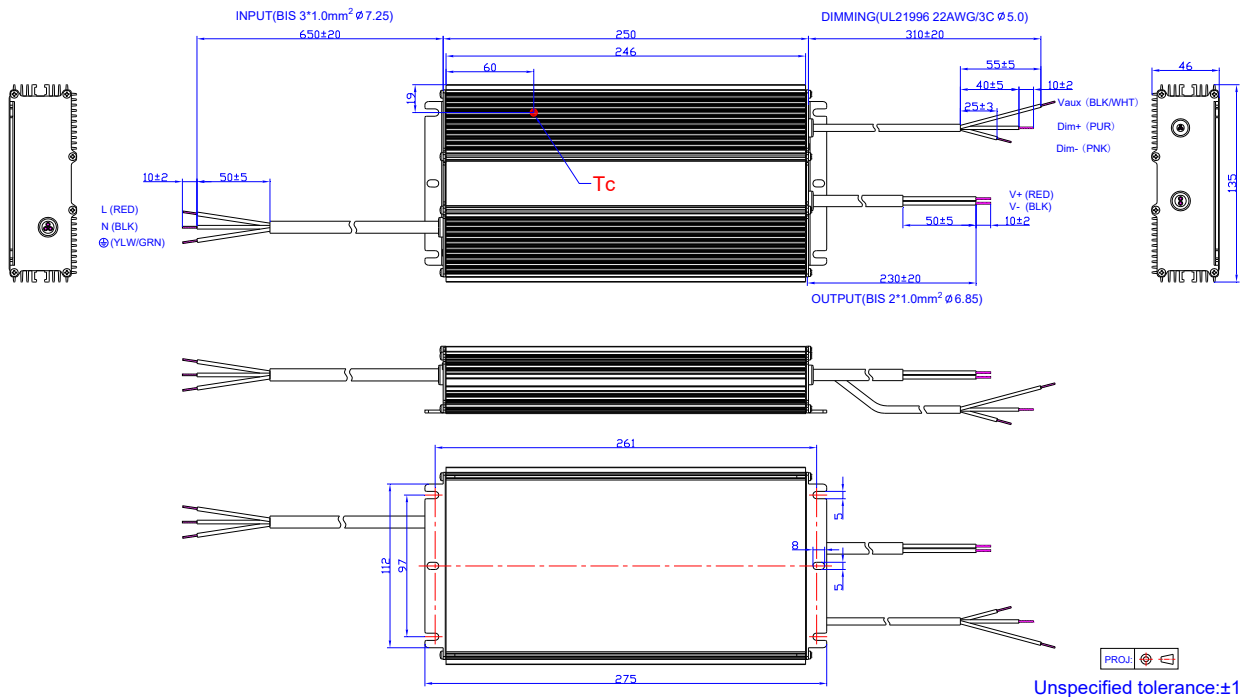

RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2021-07-02	A	Datasheet Release	/	/
2022-02-10	B	UKCA/EAC/KCC logo	/	Added
		General Specifications	Humidity	Updated
		Safety & EMC Compliance	/	Added
		Programming Connection Diagram	/	Updated
		Mechanical Outline	EUM-680SxxxMT	Updated
2023-07-14	C	Product Photograph	/	Updated
		Safety & EMC Compliance	/	Updated
		Dimming	/	Updated
		Programming Connection Diagram	/	Updated
		Mechanical Outline	/	Updated
2024-01-10	D	Format	/	Updated
		Features	/	Updated
		Safety & EMC Compliance	/	Updated
		Inrush Current Waveform	/	Updated
		Dimming	/	Updated
2024-11-26	E	Product Photograph	/	Updated
		UKCA logo	/	Deleted
		BIS logo	/	Added
		Models	Notes (4)	Updated
		Models	Notes (5)	Added
		Safety & EMC Compliance	/	Updated
		Inrush Current Waveform	/	Updated
		Mechanical Outline	/	Updated