


Features

- Ultra High Efficiency (Up to 96%)
- Compact Metal Case with Excellent Thermal Performance
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Isolated 1-10V/10V PWM/3-Timer-Modes Dimmable
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: OVP, SCP, OTP
- Low Inrush Current
- IP66/IP67
- 5 Years Warranty

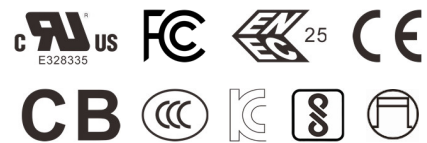

Description




The EBM-1K2SxxxDx series is a 1200W, constant-current, programmable and IP66/IP67 rated LED driver that operates from 176-305 Vac input with excellent power factor. Created for many lighting applications including high mast, sports, UV-LED, aquaculture and horticulture etc., The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

Models

Adjustable Output Current Range (mA)	Full-Power Current Range (mA) ⁽¹⁾	Default Output Current (mA)	Output Voltage Range (Vdc)	Max. Output Power (W)	Typical Efficiency ⁽²⁾	Typical Power Factor		Model Number ^{(3) (4)}
						220Vac	277Vac	
260-3500	2600-3500	3500	171-462	1200	95.5%	0.99	0.96	EBM-1K2S350Dx
395-5250	3950-5250	5250	114-304	1200	95.0%	0.99	0.96	EBM-1K2S525Dx
555-7400	5550-7400	7400	81-217	1200	95.0%	0.99	0.96	EBM-1K2S740Dx

- Notes:** (1) Output current range with constant power at 1200W.
 (2) Measured at 100% load and 220Vac input (see below "General Specifications" for details).
 (3) Certified input voltage range: 200-240Vac.
 (4) x = G are UL Recognized, ENEC and CCC, etc. models; x = B are BIS models.

I-V Operation Area

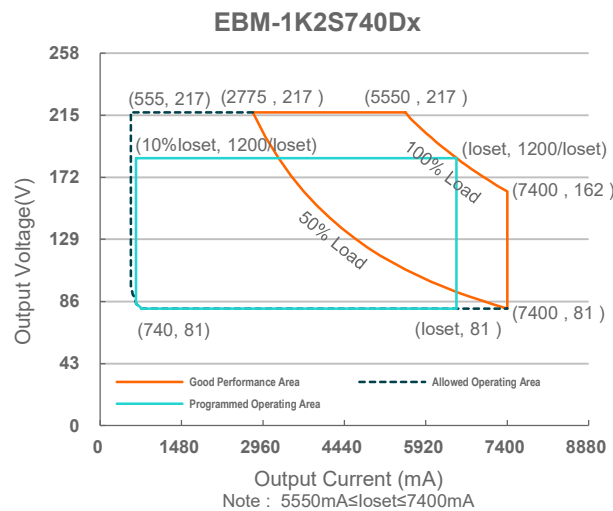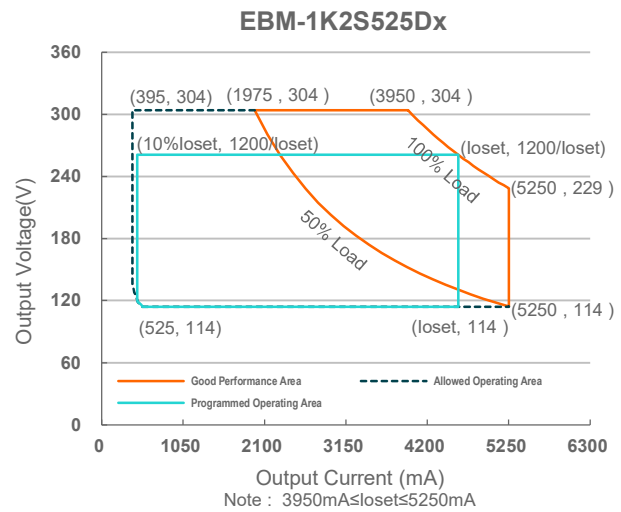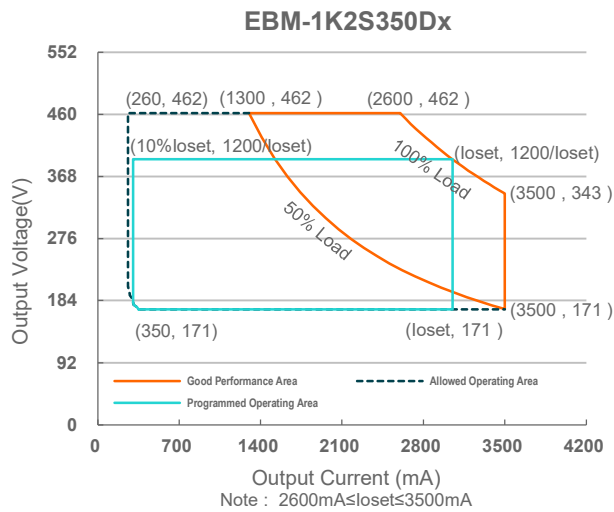

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input AC Voltage	176 Vac	-	305 Vac	
Input DC Voltage	190 Vdc	-	250 Vdc	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.70 mA	IEC 60598-1; 240Vac/ 60Hz, grounding effectively
Input AC Current	-	-	6.40 A	Measured at 100% load and 220 Vac input.
Inrush Current(I ² t)	-	-	2.70 A ² s	At 220Vac input, 25°C cold start, duration=19.8 ms, 10%I _{pk} -10%I _{pk} .

Input Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
PF	0.90	-	-	At 200-277Vac, 50-60Hz, 50%-100% Load (600 - 1200W)
THD	-	-	20%	
THD	-	-	10%	At 220-240Vac, 50-60Hz, 75%-100% Load (900 - 1200W)

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%loset	-	5%loset	100% load
Output Current Setting(loset) Range				
EBM-1K2S350Dx	260 mA	-	3500 mA	
EBM-1K2S525Dx	395 mA	-	5250 mA	
EBM-1K2S740Dx	555 mA	-	7400 mA	
Output Current Setting Range with Constant Power				
EBM-1K2S350Dx	2600 mA	-	3500 mA	
EBM-1K2S525Dx	3950 mA	-	5250 mA	
EBM-1K2S740Dx	5550 mA	-	7400 mA	
Total Output Current Ripple (pk-pk)	-	5%lomax	10%lomax	100% load, 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	-	-	2%lomax	100% load
Startup Overshoot Current	-	-	10%lomax	100% load
No Load Output Voltage				
EBM-1K2S350Dx	-	-	500 V	
EBM-1K2S525Dx	-	-	340 V	
EBM-1K2S740Dx	-	-	240 V	
Line Regulation	-	-	±0.5%	100% load
Load Regulation	-	-	±1.5%	
Turn-on Delay Time	-	-	0.5 s	Measured at 200-277Vac input, 50%-100% Load
Temperature Coefficient of loset	-	0.03%/°C	-	Case temperature = 0°C ~Tc max

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 220 Vac input:				Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
EBM-1K2S350Dx				
lo= 2600 mA	93.0%	95.0%	-	
lo= 3500 mA	93.5%	95.5%	-	
EBM-1K2S525Dx				
lo= 3950 mA	93.0%	95.0%	-	
lo= 5250 mA	93.0%	95.0%	-	
EBM-1K2S740Dx				
lo= 5550 mA	93.0%	95.0%	-	
lo= 7400 mA	93.0%	95.0%	-	

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 277 Vac input: EBM-1K2S350Dx I _o = 2600 mA I _o = 3500 mA EBM-1K2S525Dx I _o = 3950 mA I _o = 5250 mA EBM-1K2S740Dx I _o = 5550 mA I _o = 7400 mA	94.0% 94.0% 93.5% 93.5% 93.5% 93.5%	96.0% 96.0% 95.5% 95.5% 95.5% 95.5%	- - - - - -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
MTBF	-	203,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	100,000 Hours	-	Measured at 220Vac input, 80%Load and 70°C case temperature; See lifetime vs. Tc curve for the details
	-	54,000 Hours	-	Measured at 220Vac input, 100%Load and 40°C ambient temperature
Operating Case Temperature for Safety T _{c_s}	-40°C	-	+90°C	
Operating Case Temperature for Warranty T _{c_w}	-40°C	-	+80°C	Case temperature for 5 years warranty Humidity: 10% RH to 95% RH;
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 95%RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	11.22 × 5.55 × 1.91 285 × 141 × 48.5			With mounting ear 12.21 × 5.55 × 1.91 310 × 141 × 48.5
Net Weight	-	3800 g	-	

Dimming Specifications


Parameter	Min.	Typ.	Max.	Notes	
Absolute Maximum Voltage on the V _{dim} (+) Pin	-20 V	-	20 V		
Source Current on V _{dim} (+) Pin	200 uA	300 uA	450 uA	V _{dim} (+) = 0 V	
Dimming Output Range	EBM-1K2S350Dx EBM-1K2S525Dx EBM-1K2S740Dx	10%I _o set	-	I _o set	2600 mA ≤ I _o set ≤ 3500 mA 3950 mA ≤ I _o set ≤ 5250 mA 5550 mA ≤ I _o set ≤ 7400 mA
	EBM-1K2S350Dx EBM-1K2S525Dx EBM-1K2S740Dx	260 mA 395 mA 555 mA	-	I _o set	260 mA ≤ I _o set < 2600 mA 395 mA ≤ I _o set < 3950 mA 555 mA ≤ I _o set < 5550 mA
Recommended Dimming Input Range	1 V	-	9 V	Default 1-10V dimming mode with positive logic.	
PWM_in High Level	-	10V	-		
PWM_in Low Level	-	0V	-		
PWM_in Frequency Range	200 Hz	-	2 KHz		
PWM_in Duty Cycle	0%	-	100%		

Safety & EMC Compliance


Safety Category	Standard
UL/CUL	UL 8750, CAN/CSA-C22.2 No. 250.13
ENEC & CE	EN 61347-1, EN 61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
CCC	GB 19510.1, GB 19510.14
KC	KC 61347-1, KC 61347-2-13
BIS	IS 15885(Part2/Sec13)
Performance	Standard
ENEC	EN IEC 62384
EMI Standards	Notes
EN IEC 55015/GB/T 17743/ KS C 9815 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN IEC 61000-3-2/GB 17625.1	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15 ⁽¹⁾	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired Operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 6 kV, Common Mode 10 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547/KS C 9547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.


Derating

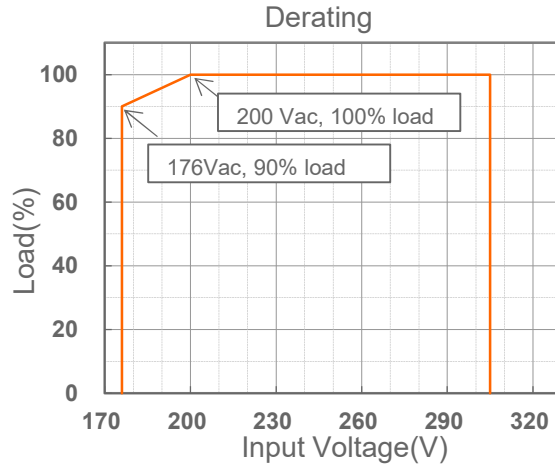

Lifetime vs. Case Temperature

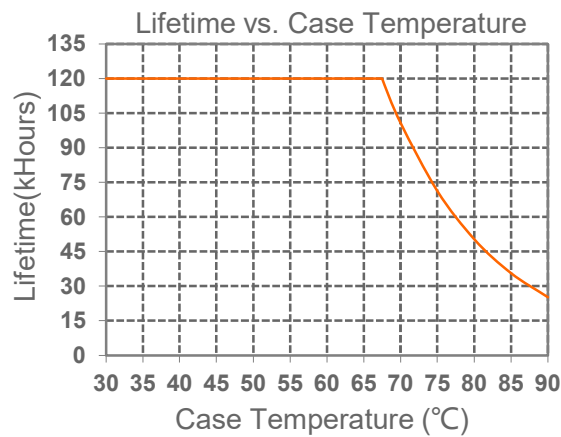

Inrush Current Waveform




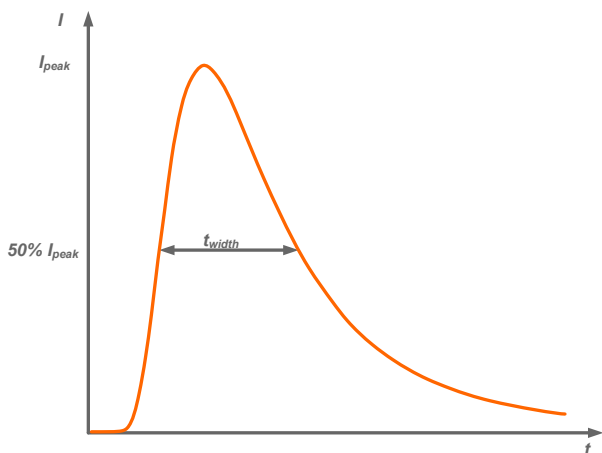




Input AC Voltage	I_{peak}	t_{width} (@ 50% I_{peak})
220Vac	13.4 A	5.84 ms
277Vac	16.8 A	5.60 ms

Inrush Current Waveform (Continued)


MCB	Tripping Curves	B	B	B	B	C	C	C	C
	Rated Current	10A	16A	20A	25A	10A	16A	20A	25A
The Number of LED Driver can be Configured	220Vac	1	1	2	2	1	1	2	3
	277Vac	1	2	2	3	1	2	3	3

Efficiency vs. Load

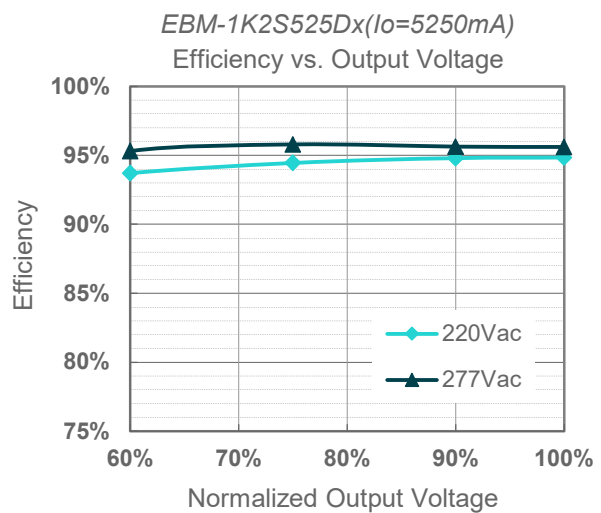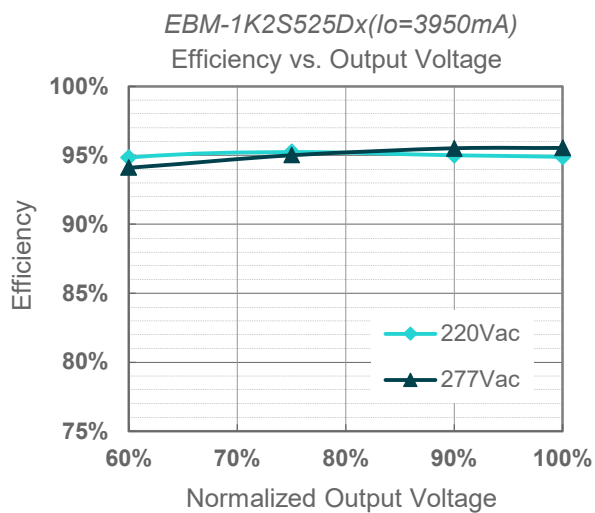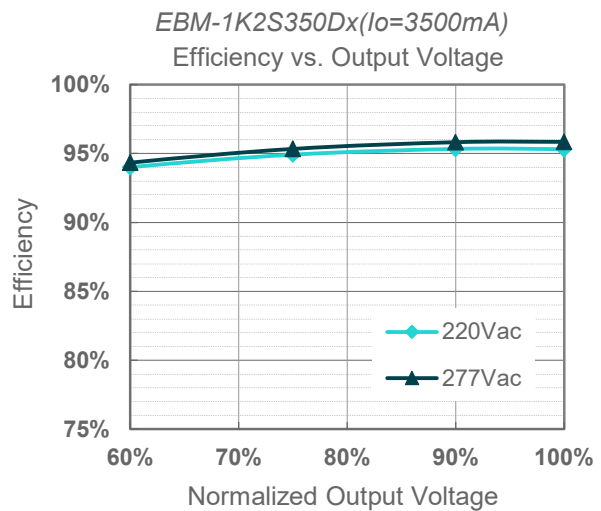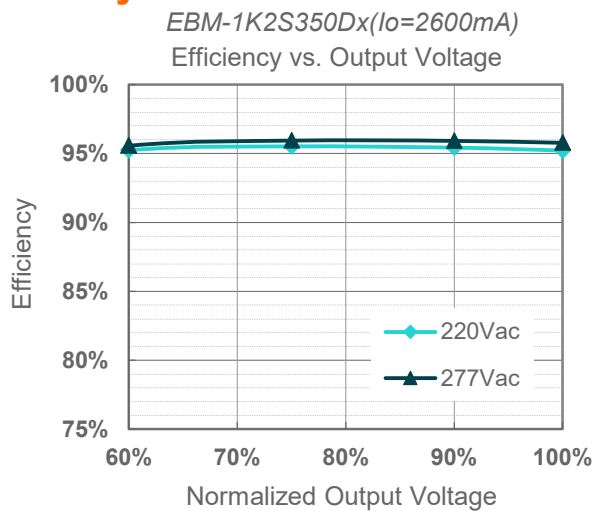


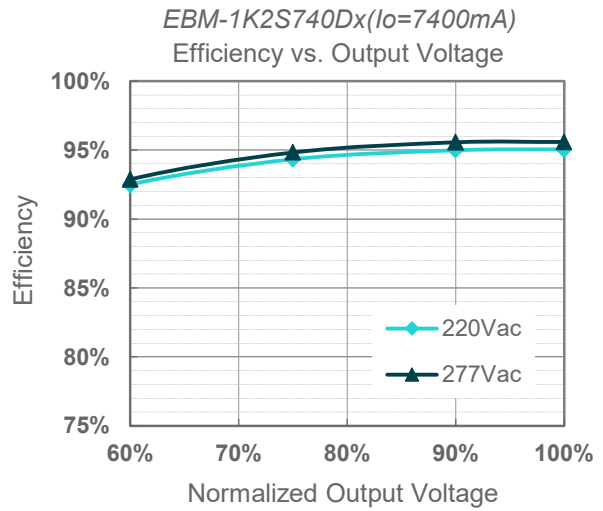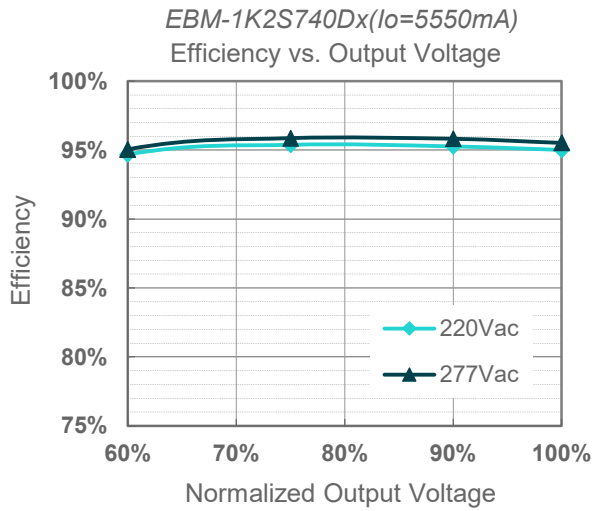

Power Factor

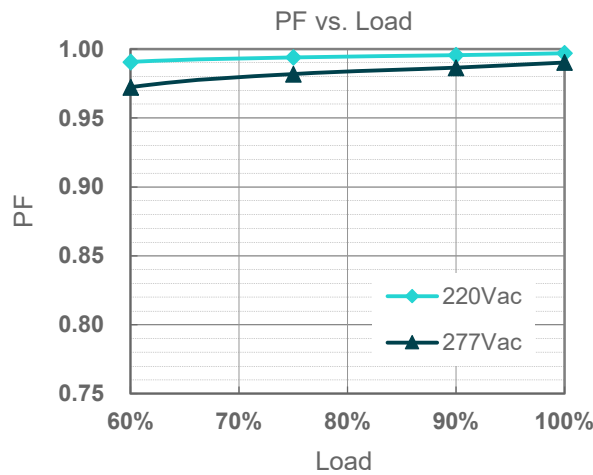

Total Harmonic Distortion

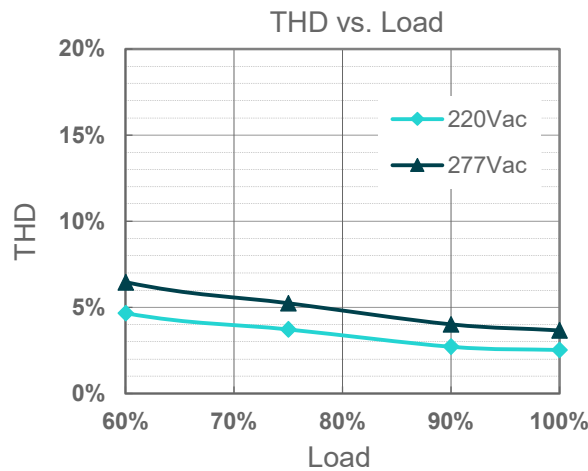



Protection Functions

Parameter	Notes
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.

Dimming

● 1-10V Dimming

The recommended implementation of the dimming control is provided below.

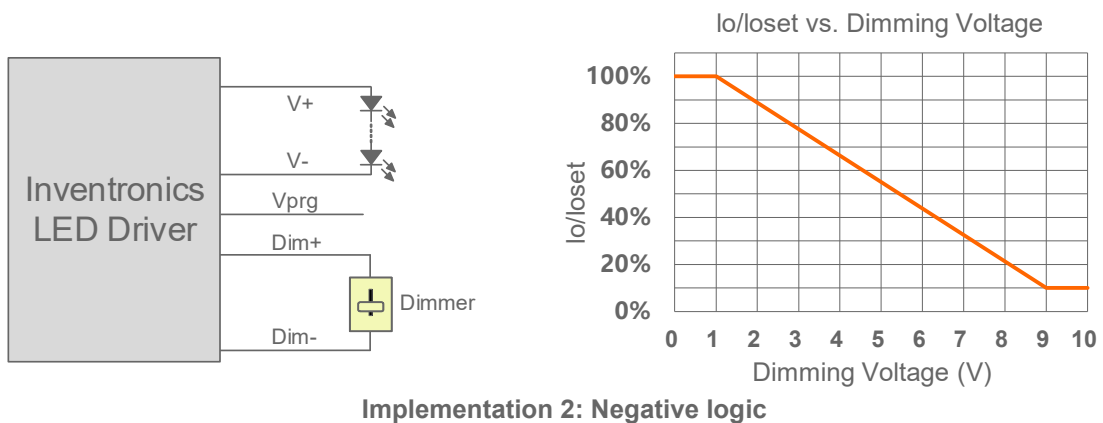
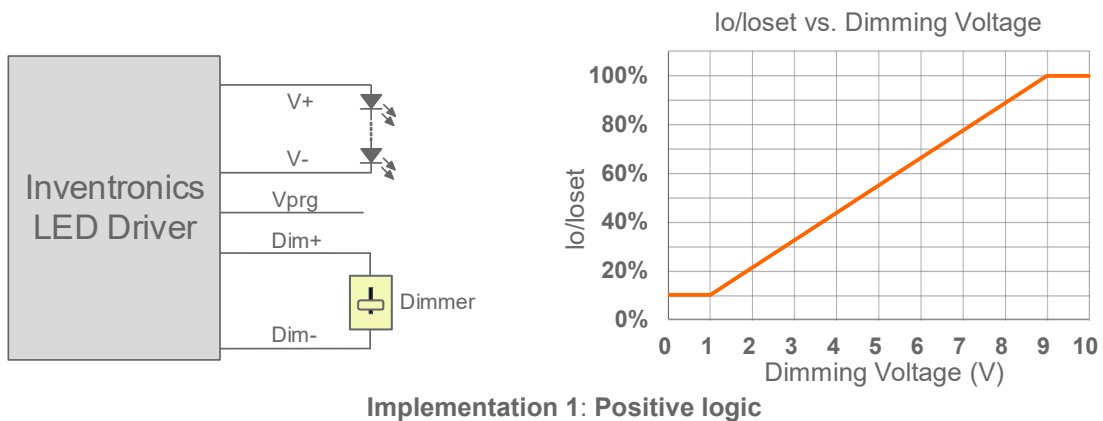


Notes:

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 1-10V voltage source signal or passive components like zener.
3. When 1-10V negative logic dimming mode and Dim+ is open, the driver will output minimum current.

● 10V PWM Dimming

The recommended implementation of the dimming control is provided below.

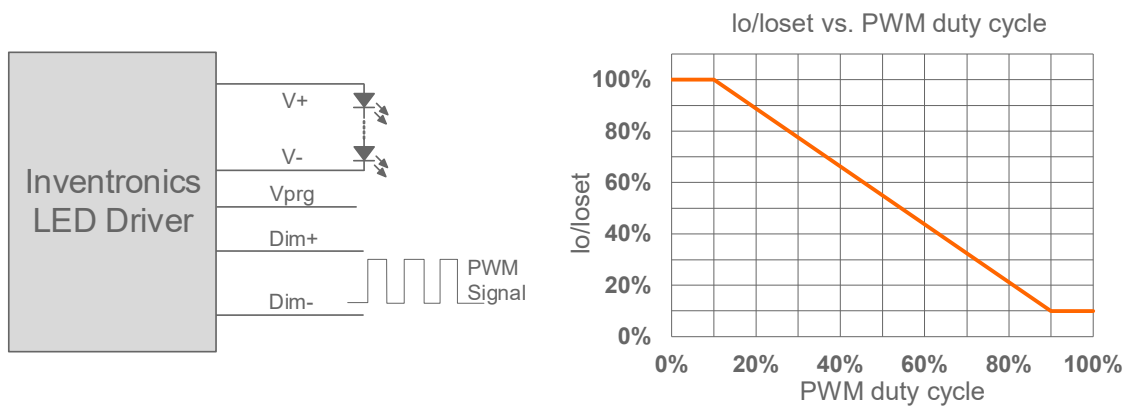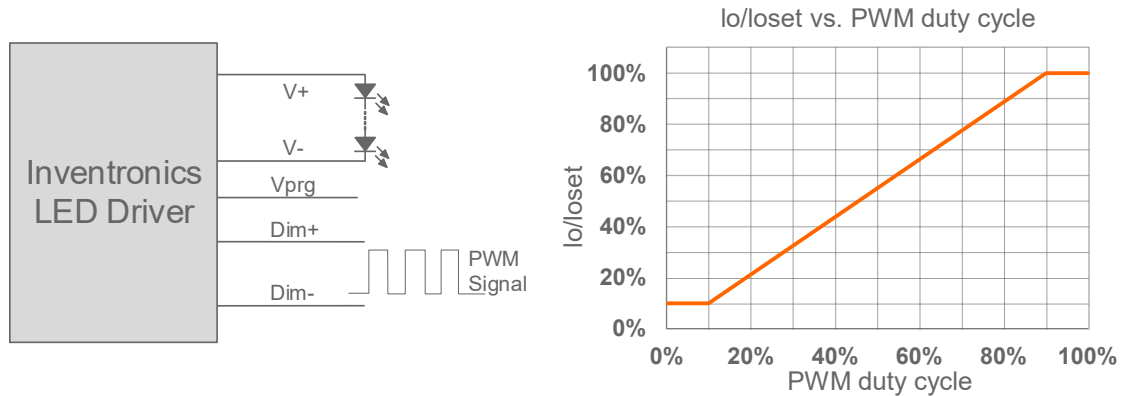

Notes:

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. When 10V PWM negative logic dimming mode and Dim+ is open, the driver will output minimum current.

● Time Dimming

Time dimming control includes 3 kinds of modes, they are Self Adapting-Midnight, Self Adapting-Percentage and Traditional Timer.

- **Self Adapting-Midnight:** Automatically adjusts the dimming curve based on the on-time of past two days (if difference <15 minutes), assuming that the center point of the dimming curve is midnight local time.
- **Self Adapting-Percentage:** Automatically adjusts the on-time of each step by a constant percentage = (actual on-time for the past 2 days if difference <15 min) / (programmed on-time from the dimming curve).
- **Traditional Timer:** Follows the programmed timing curve after power on with no changes.


● Output Lumen Compensation

Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation.

● End Of Life

End-of-Life (EOL) is providing a visual notification to a user that the LED module has reached the end of manufacturer-specified life and that the replacement is recommended. Once active, an indication is given at each power-up of the driver, which the driver indicates this through a lower light output during the first 1 minute before normal operation is continued. file for details.

Programming Connection Diagram

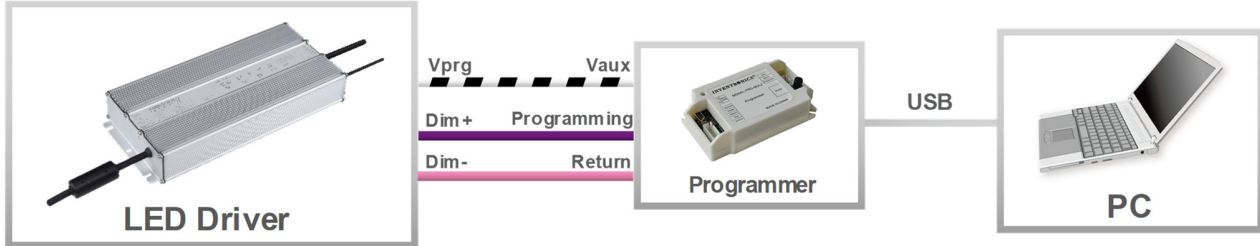


Note: The driver does not need to be powered on during the programming process.


● Please refer to [PRG-MUL2](#) (Programmer) datasheet for details.

Mechanical Outline

EBM-1K2SxxxDG

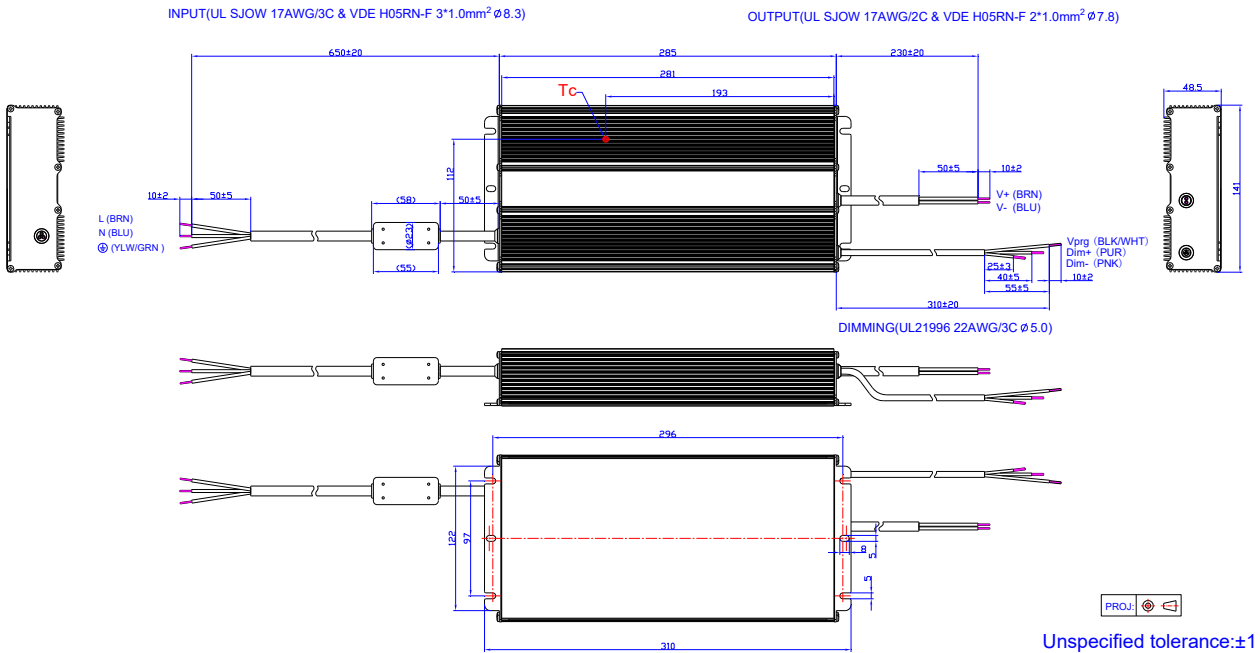

EBM-1K2SxxxDB

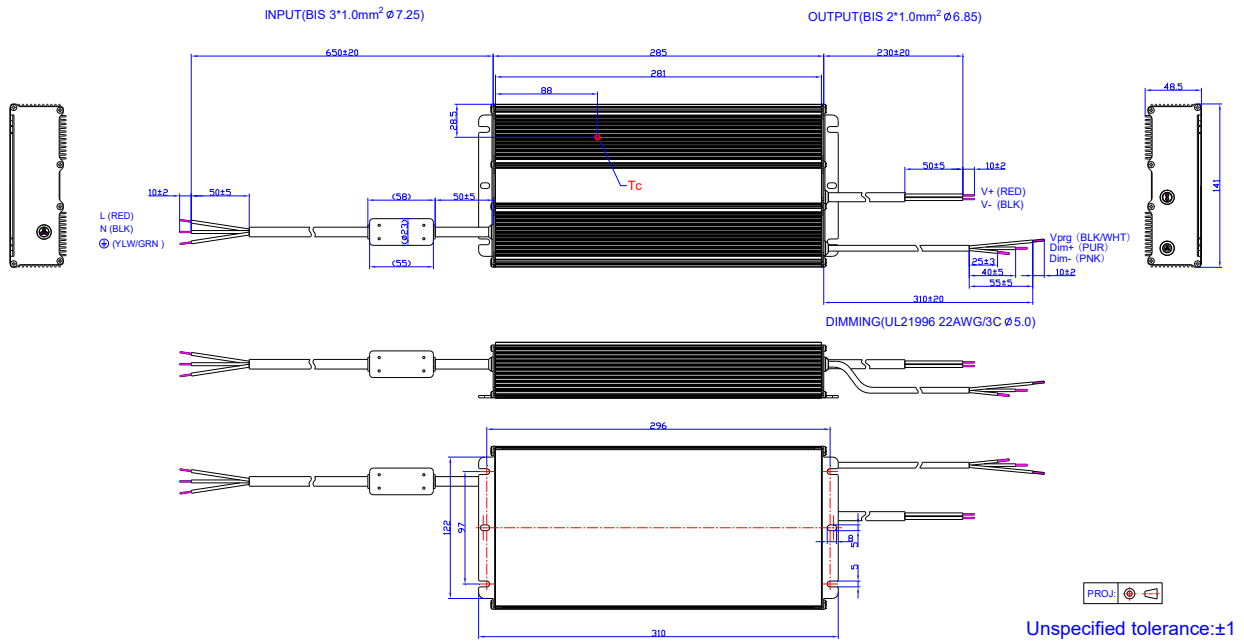

RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2021-02-05	A	Datasheet Release	/	/
2021-12-02	B	ENEC logo	/	Updated
		UKCA logo	/	Updated
		Safety &EMC Compliance	ENEC	Updated
		Safety &EMC Compliance	UKCA	Updated
2021-12-17	C	Product Photograph	/	Updated
		EAC logo	/	Added
		Safety &EMC Compliance	EAC	Added
2023-05-25	D	Product Photograph	/	Updated
		Safety &EMC Compliance	/	Updated
		Dimming	/	Updated
		Programming Connection Diagram	/	Updated
		Mechanical Outline	/	Updated
2024-07-30	E	Format	/	Updated
		Product Photograph	/	Updated
		UKCA logo	/	Deleted
		UL/FCC/BIS logo	/	Added
		Models	Note (4)	Added
		Safety &EMC Compliance	/	Updated
		Inrush Current Waveform	/	Updated
		Mechanical Outline	/	Updated
2025-01-09	F	EAC logo	/	Deleted
		Safety &EMC Compliance	/	Updated